
F A5HP 1/8 NPT EXT*

Codice articolo: **801601016** / **Hembra** / ***Prodotto disponibile su richiesta**

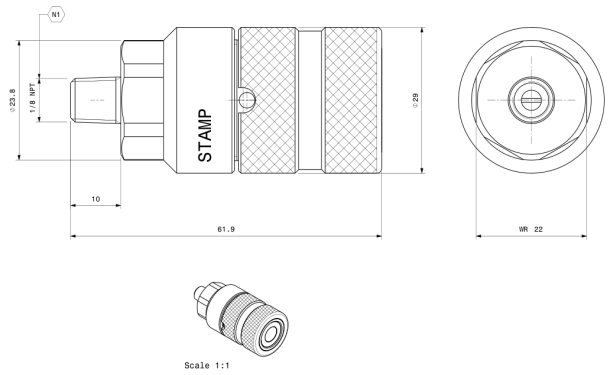

Estilo de válvula Cara plana	**Dimensión** 1/4"
Sellado Nitrile NBR	**Tratamiento** Cr3
Intercambio Perfil Stucchi A-HP	**Sistema de conexión** Push
Sistema de desconexión Tirar el manguito hacia atrás	**Material** Acero al carbono
Mecanismo de bloqueo Bola de bloqueo + Manguito de seguridad	**Desconexión con presión** No
Roscas MALE THREAD NPT (ANSI B1.20.1)	**Conexión con presión residual** No
Temperatura -20 / +100 °C; -4 / +212 °F	**Aplicaciones** Equipos de rescate, Centrales hidráulicas, Herramientas hidráulicas

Rendimiento	IMPERIAL
Caudal máximo (gpm)	6.36
Presión de trabajo máxima - acoplado (psi)	10150
Presión de trabajo - desacoplado (psi)	7250
Presión de ruptura - acoplado (psi)	29000
Presión de ruptura - acoplado (psi)	21750
Fuerza de conexión (lbf)	28.125
Fuerza de desconexión (lbf)	10.125
Pérdida (ml)	0.02

Tamaño	IMPERIAL
Dimensión roscas (A)	1/8"
Longitud total M+F (in)	4,48
Longitud (in)	2,44
Diámetro máximo (in)	0,94
Peso (lb)	0,43

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service