
M I12GS S16*

Codice articolo: **809409019** / **Macho** / ***Prodotto disponibile su richiesta**

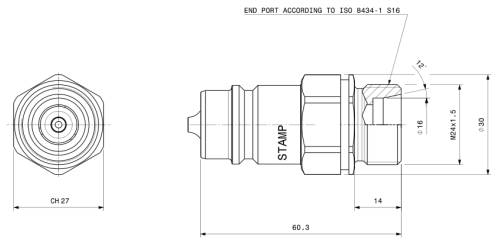

Sistema de vedação Poppet	**Tamanho do acoplamento** 1/2"
Vedação Nitrile NBR	**Tratamento** Cr3
Intercambiabilidade ISO 7241 A	**Sistema de conexão** Empurrar
Sistema de desconexão Puxar	**Material** Aço carbono de alta resistência
Mecanismo de trava Esfera de bloqueio	**Desconexão sob pressão** Não
Rosca MALE THREAD METRIC S - 24° CONE (ISO 8434-1 & DIN 2353)	**Conexão com pressão residual** Não
Temperatura -20 / +100 °C; -4 / +212 °F	**Aplicações** Máquinas agrícolas, Implementos agrícolas, Agricultura

Desempenho	METRIC
ISO DN (mm)	12.5
Vazão máxima (l/min)	90
Pressão de trabalho máxima - acoplado (MPa)	25
Pressão de trabalho - desacoplado (MPa)	25
Pressão de ruptura - acoplado (MPa)	90
Pressão de ruptura - desacoplado (MPa)	100
Força de conexão (N)	90
Força de desconexão (N)	80
Vazamento (ml)	1.8

Tamanho	METRIC
Tamanho da conexão (A)	M24X1.5
Comprimento total M+F (mm)	107
Comprimento (mm)	60,3
Diâmetro máximo (mm)	30
Peso (kg)	0,14

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service