


F IC15R 3/4 BSP

Codice articolo: **813500224** / **Muffe**

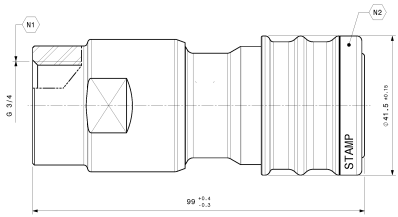





Dichtungssystem Flat Face	**Größe** 5/8"
Dichtung EPDM	**Oberflächenschutz** Ossidazione dura
Austausch Profilo Stucchi IC	**Verbindungssystem** Drücken
Betätigungsart Druckhülse	**Werkstoff** Alluminio
Verriegelungsmechanismus Verschlusskugel	**Druckentlastende Trennung** Nein
Gewinde FEMALE THREAD BSPP (ISO 1179-1)	**Anschluss mit Restdruck** Nein
Temperatur -40 / +150 °C; -40 / +302 °F	**Anwendung** Rechenzentrum, Bahn, Windkraft, Medizintechnik, Sonstige, Digitale Sender, Elektrofahrzeuge, HVAC/R, Laser, Verteidigung, Halbleiter

Performance	IMPERIAL
Maximaler Betriebsdruck - gekoppelt (psi)	290
Betriebsdruck - entkoppelt (psi)	290
Platzerdruck - gekoppelt (psi)	1160
Platzerdruck - entkoppelt (psi)	1160
Verbindungsfestigkeit (lbf)	31,3
Trennkraft (lbf)	10,6
Leckage (ml)	0,01

Größen	IMPERIAL
Anschlussgröße (A)	3/4"
Gesamtlänge M+F (in)	5,34
Länge (in)	3,9
Maximaler Durchmesser (in)	1,63
Gewicht (lb)	0,42

Verwandte Produkte

Produkt-code	Tipologia	Produktname
813517225	Maschio	M IC15R 3/4 BSP EXT

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service