
M IR38 BSP

Codice articolo: **800000003 / Stecker**

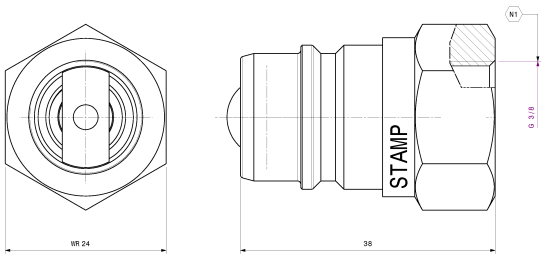

Dichtungssystem Verschlusskugel	**Größe** 3/8"
Dichtung Nitrile NBR	**Oberflächenschutz** Cr3
Austausch Vergleichbaren Kupplungen (IR)	**Verbindungssystem** Einfachwirkende Hülse und Drücken
Betätigungsart Druckhülse	**Werkstoff** Automatenstahl
Verriegelungsmechanismus Verschlusskugel	**Druckentlastende Trennung** Nein
Gewinde FEMALE THREAD BSPP (ISO 1179-1)	**Anschluss mit Restdruck** Nein
Temperatur -20 / +100 °C; -4 / +212 °F	**Anwendung** Landmaschinen, Landwirtschaftliche Anbaugeräte, Landwirtschaft

Performance	METRIC
Maximaler Durchfluss (l/min)	46
Maximaler Betriebsdruck - gekoppelt (MPa)	30
Betriebsdruck - entkoppelt (MPa)	30
Platzerdruck - gekoppelt (MPa)	100
Platzerdruck - entkoppelt (MPa)	100
Verbindungsfestigkeit (N)	125
Trennkraft (N)	45
Leckage (ml)	0.45

Größen	METRIC
Anschlussgröße (A)	3/8"
Gesamtlänge M+F (mm)	76,3
Länge (mm)	38
Maximaler Durchmesser (mm)	19
Gewicht (kg)	0,08

Verwandte Produkte

Produkt-code	Tipologia	Produktname
800000002	Femmina	F IR38 BSP

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service