
M IR12TIC BSP

Codice articolo: **800000011** / **Stecker**

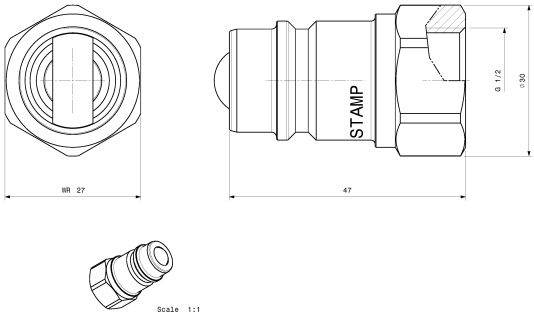

Dichtungssystem Verschlusskugel	**Größe** 1/2"
Dichtung Nitrile NBR	**Oberflächenschutz** Cr3
Austausch ISO 7241 A	**Verbindungssystem** Einfachwirkende Hülse und Drücken
Betätigungsart Druckhülse	**Werkstoff** Automatenstahl
Verriegelungsmechanismus Verschlusskugel	**Druckentlastende Trennung** Nein
Gewinde FEMALE THREAD BSPP (ISO 1179-1)	**Anschluss mit Restdruck** Nein
Temperatur -20 / +100 °C; -4 / +212 °F	**Anwendung** Landmaschinen, Landwirtschaftliche Anbaugeräte, Landwirtschaft

Performance	IMPERIAL
ISO DN (mm)	12.5
Maximaler Durchfluss (gpm)	23.85
Maximaler Betriebsdruck - gekoppelt (psi)	3625
Betriebsdruck - entkoppelt (psi)	2900
Platzerdruck - gekoppelt (psi)	11600
Platzerdruck - entkoppelt (psi)	7975
Verbindungsfestigkeit (lbf)	18
Trennkraft (lbf)	11.25
Leckage (ml)	2.3

Größen	IMPERIAL
Anschlussgröße (A)	1/2"
Gesamtlänge M+F (in)	3,4
Länge (in)	1,85
Maximaler Durchmesser (in)	0,81
Gewicht (lb)	0,22

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service