
F IP12 1/2 NPT

Codice articolo: **809401000** / **Muffe**

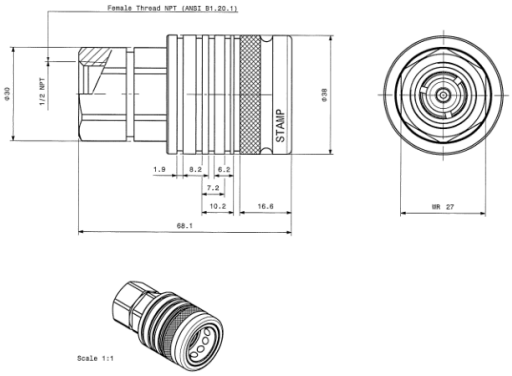

Dichtungssystem Schnellverschlusskupplungen	**Größe** 1/2"
Dichtung Nitrile NBR	**Oberflächenschutz** Cr3
Austausch ISO 7241 A	**Verbindungssystem** Drücken
Betätigungsart Ziehen	**Werkstoff** Automatenstahl
Verriegelungsmechanismus Verschlusskugel	**Druckentlastende Trennung** Nein
Gewinde FEMALE THREAD NPT (ANSI B.1.20.1)	**Anschluss mit Restdruck** Nein
Temperatur -20 / +100 °C; -4 / +212 °F	**Anwendung** Landmaschinen, Landwirtschaftliche Anbaugeräte, Landwirtschaft

Performance	IMPERIAL
ISO DN (mm)	12.5
Maximaler Durchfluss (gpm)	23.85
Maximaler Betriebsdruck - gekoppelt (psi)	3625
Betriebsdruck - entkoppelt (psi)	3625
Platzerdruck - gekoppelt (psi)	13050
Platzerdruck - entkoppelt (psi)	14500
Verbindungsfestigkeit (lbf)	20,25
Trennkraft (lbf)	18
Leckage (ml)	1.8

Größen	IMPERIAL
Anschlussgröße (A)	1/2"
Gesamtlänge M+F (in)	4,17
Länge (in)	2,68
Maximaler Durchmesser (in)	1,5
Gewicht (lb)	0,62

Spare kits

Produkt-code	Produktname
815700928	SPARE KIT OR NBR+BK F IP12

Caps

Produkt-code	Produktname
815000004	PLASTIC PLUG F ISO-A/IR12 RED

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service