
F IP12 L8

Codice articolo: **809408002** / **Muffe**

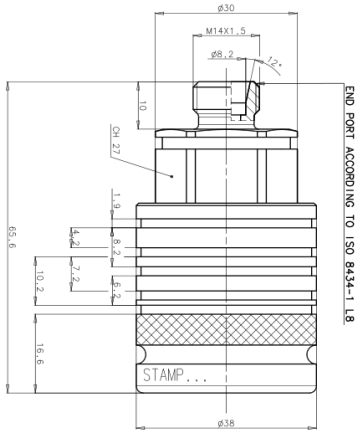

Dichtungssystem Schnellverschlusskupplungen	**Größe** 1/2"
Dichtung Nitrile NBR	**Oberflächenschutz** Cr3
Austausch ISO 7241 A	**Verbindungssystem** Drücken
Betätigungsart Ziehen	**Werkstoff** Automatenstahl
Verriegelungsmechanismus Verschlusskugel	**Druckentlastende Trennung** Nein
Gewinde MALE THREAD METRIC L - 24° CONE (ISO 8434-1 & DIN 2353)	**Anschluss mit Restdruck** Nein
Temperatur -20 / +100 °C; -4 / +212 °F	**Anwendung** Landmaschinen, Landwirtschaftliche Anbaugeräte, Landwirtschaft

Performance	METRIC
ISO DN (mm)	12.5
Maximaler Durchfluss (l/min)	90
Maximaler Betriebsdruck - gekoppelt (MPa)	25
Betriebsdruck - entkoppelt (MPa)	25
Platzerdruck - gekoppelt (MPa)	90
Platzerdruck - entkoppelt (MPa)	100
Verbindungsfestigkeit (N)	90
Trennkraft (N)	80
Leckage (ml)	1.8

Größen	METRIC
Anschlussgröße (A)	M14x1.5
Gesamtlänge M+F (mm)	101
Länge (mm)	65,6
Maximaler Durchmesser (mm)	38
Gewicht (kg)	0,26

Spare kits

Produkt-code	Produktname
815700928	SPARE KIT OR NBR+BK F IP12

Caps

Produkt-code	Produktname
815000004	PLASTIC PLUG F ISO-A/IR12 RED

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service