
F IR14V 3/8 SAE*

Codice articolo: **800104000** / **Female** / ***Prodotto disponibile su richiesta**

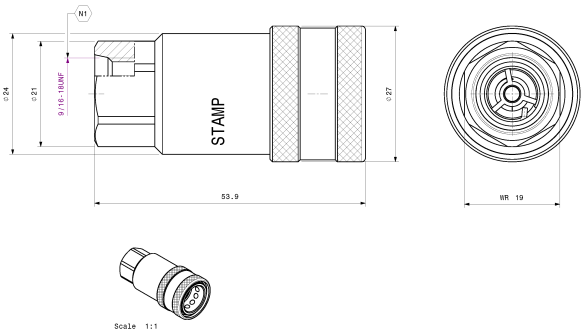

Valving style Poppet	**Body size** 1"
Sealing FKM (VITON)	**Treatment** Cr3
Interchange Similar couplings (IR-V)	**Connection system** Pull back the sleeve and push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball	**Disconnectable under pressure** No
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connectable under residual pressure** No
Temperature -15 / +180 °C; +5 / +356 °F	**Applications** Agricultural Machinery, Agricultural Attachments, Agriculture

Performance	METRIC
Max. Flow suggested (l/min)	200
Max. Operating pressure - coupled (MPa)	20
Operating pressure - uncoupled (MPa)	20
Burst pressure - coupled (MPa)	80
Burst pressure - uncoupled (MPa)	80
Connect force (N)	210
Disconnect force (N)	65
Spillage (ml)	5.5

Dimensions	METRIC
Port (A)	9/16-18UNF
Overall length M+F (mm)	57
Length (mm)	53,9
Max. diameter (mm)	27
Weight (kg)	0,12

Related products

Item code	Type	Product name
800104001	Maschio	M IR14V 3/8 SAE

Spare kits

Item code	Product name
815700348	SPARE KIT OR NBR F IR14

Caps

Item code	Product name
815000012	PLASTIC PLUG F ISO-A 14 RED
815001012	PLASTIC PLUG F ISO-A 14 YELLOW**
815002012	PLASTIC PLUG F ISO-A 14 BLUE**
815003012	PLASTIC PLUG F ISO-A 14 BLACK**
815004012	PLASTIC PLUG F ISO-A 14 GREEN**
815005012	PLASTIC PLUG F ISO-A 14 WHITE**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service