
# F IRB14 BSP

Codice articolo: **800600002** / **Female**

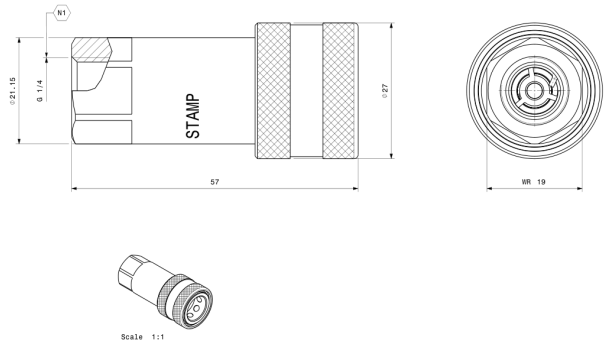


| | |
|---|---|
| **Valving style**<br>Poppet | **Body size**<br>1/4" |
| **Sealing**<br>Nitrile NBR | **Treatment**<br>Cr3 |
| **Interchange**<br>ISO 7241 B | **Connection system**<br>Pull back the sleeve and push |
| **Disconnection system**<br>Pull back the sleeve | **Material**<br>Carbon steel |
| **Locking mechanism**<br>Locking ball | **Disconnectable under pressure**<br>No |
| **Thread**<br>FEMALE THREAD BSPP (ISO 1179-1) | **Connectable under residual pressure**<br>No |
| **Temperature**<br>-20 / +100 °C; -4 / +212 °F | **Applications**<br>Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Foundation, Material Handling, Road Construction, Steel Mill, Test Bench, Hydraulic Power Units, Earthmoving, Agriculture, Oil & Gas |

| Performance | METRIC |
|---|---|
| ISO DN (mm) | 6.3 |
| Max. Flow suggested (l/min) | 24 |
| Max. Operating pressure - coupled (MPa) | 35 |
| Operating pressure - uncoupled (MPa) | 35 |
| Burst pressure - coupled (MPa) | 100 |
| Burst pressure - uncoupled (MPa) | 100 |
| Connect force (N) | 50 |
| Disconnect force (N) | 35 |
| Spillage (ml) | 0.33 |

| Dimensions | METRIC |
|---|---|
| Port (A) | 1/4" |
| Overall length M+F (mm) | 70,7 |
| Length (mm) | 57 |
| Max. diameter (mm) | 27 |
| Weight (kg) | 0,12 |

## Related products

| Item code | Type | Product name |
|---|---|---|
| 800600003 | Maschio | M IRB14 BSP |

## Spare kits

| Item code | Product name |
|---|---|
| 815700204 | SPARE KIT OR NBR+BK F ISOB 14 |

## Caps

| Item code | Product name |
|---|---|
| 815000032 | PLASTIC PLUG F ISO-B 14 RED |
| 815003032 | PLASTIC PLUG F ISO-B 14 BLACK* |

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service