
M FIRG13 1/2 BSP

Codice articolo: **800800007** / **Male**

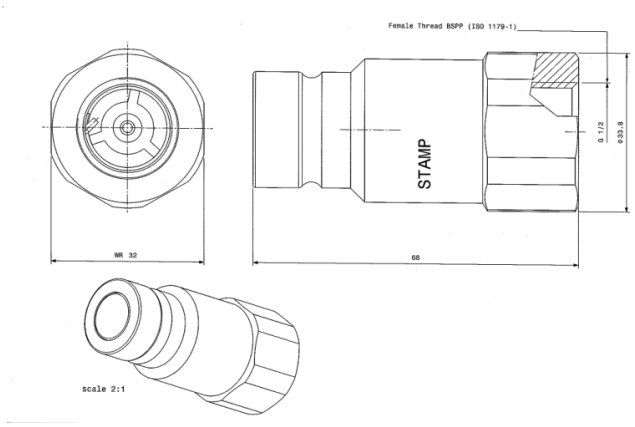

Valving style Flat face	**Body size** 1/2"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball + Safety lock	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** No
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Test Bench, Hydraulic Tools, Earthmoving, Agriculture, Vehicles, Oil & Gas

Performance	METRIC
ISO DN (mm)	12.5
Max. Flow suggested (l/min)	90
Max. Operating pressure - coupled (MPa)	25
Operating pressure - uncoupled (MPa)	25
Burst pressure - coupled (MPa)	100
Burst pressure - uncoupled (MPa)	100
Connect force (N)	160
Disconnect force (N)	60
Spillage (ml)	0.02

Dimensions	METRIC
Port (A)	1/2"
Overall length M+F (mm)	124,5
Length (mm)	68
Max. diameter (mm)	24,5
Weight (kg)	0,23

Related products

Item code	Type	Product name
800800006	Femmina	F FIRG13 1/2 BSP

Spare kits

Item code	Product name
815700339	SPARE KIT OR NBR+BK M FF 12

Caps

Item code	Product name
815100029	PLASTIC CAP M FF12 RED
816005007	ALUMINUM CAP M FF12 NATURAL
815101029	PLASTIC CAP M FF12 YELLOW*
815102029	PLASTIC CAP M FF12 BLUE*
815103029	PLASTIC CAP M FF12 BLACK*
815104029	PLASTIC CAP M FF12 GREEN*
815105029	PLASTIC CAP M FF12 WHITE*
815106031	PLASTIC CAP M FF12 GREEN RAL 6003 BIG RING*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service