
M VEP15HD 3/4 BSP

Codice articolo: **808100011** / **Male**

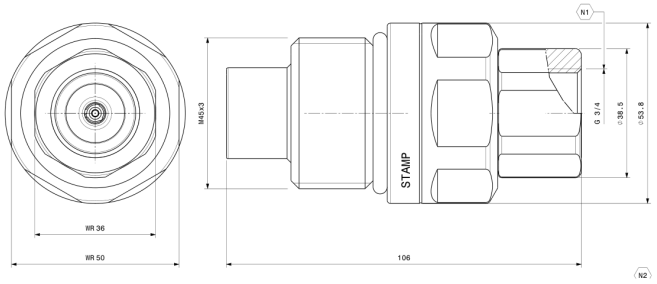

Valving style Flat face	**Body size** 5/8"
Sealing Nitrile NBR	**Treatment** Cr3 + QPQ
Interchange Stucchi profile VEP	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** Yes
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in both sides
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Hydraulic Tools, Earthmoving, Vehicles, Oil & Gas

Performance	METRIC
Max. Flow suggested (l/min)	148
Max. Operating pressure - coupled (MPa)	55
Operating pressure - uncoupled (MPa)	55
Burst pressure - coupled (MPa)	140
Burst pressure - uncoupled (MPa)	140
Spillage (ml)	0.03
Manual connect torque (Nm)	3
Manual disconnect torque (Nm)	1.8
Tightening torque (Nm)	70-80
Max. residual pressure during connection (in the male, female to drain) (Mpa)	25
Max. residual pressure during connection (in the female, male to drain) (Mpa)	25
Max. residual pressure during connection (in male and female) (Mpa)	20
Max. residual pressure during disconnection (Mpa)	20

Dimensions	METRIC
Port (A)	3/4"
Overall length M+F (mm)	172,4
Length (mm)	106
Max. diameter (mm)	53,8
Weight (kg)	0,94

Related products

Item code	Type	Product name
808100010	Femmina	F VEP15HD 3/4 BSP

Spare kits

Item code	Product name
815700738	SPARE KIT OR NBR+BK M VEP15

Caps

Item code	Product name
815303131	PLASTIC CAP M VEP15 BLACK
815305077	ALUMINUM CAP M VEP15 NATURAL
815300077	ALUMINUM CAP M VEP15 RED*
815301077	ALUMINUM CAP M VEP15 YELLOW*
815302077	ALUMINUM CAP M VEP15 BLUE*
815303077	ALUMINUM CAP M VEP15 BLACK*
815304077	ALUMINUM CAP M VEP15 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service