
M VEP17HD 3/4 BSP

Codice articolo: **808100019** / **Male**

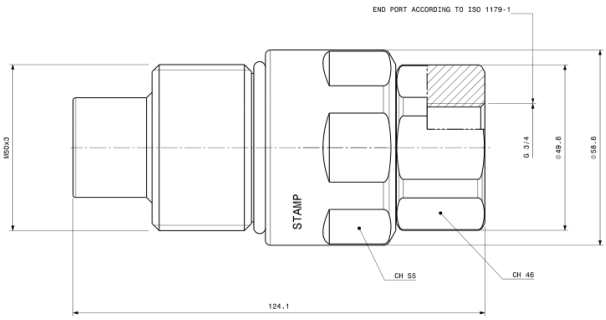

Valving style Flat face	**Body size** 3/4"
Sealing Nitrile NBR	**Treatment** Cr3 + QPQ
Interchange Stucchi profile VEP	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** Yes
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in both sides
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Hydraulic Tools, Earthmoving, Vehicles, Oil & Gas

Performance	METRIC
Max. Flow suggested (l/min)	200
Max. Operating pressure - coupled (MPa)	50
Operating pressure - uncoupled (MPa)	50
Burst pressure - coupled (MPa)	125
Burst pressure - uncoupled (MPa)	125
Spillage (ml)	0.02
Manual connect torque (Nm)	5.6
Manual disconnect torque (Nm)	3.6
Tightening torque (Nm)	110-130
Max. residual pressure during connection (in the male, female to drain) (Mpa)	25
Max. residual pressure during connection (in the female, male to drain) (Mpa)	25
Max. residual pressure during connection (in male and female) (Mpa)	15
Max. residual pressure during disconnection (Mpa)	15

Dimensions	METRIC
Port (A)	3/4"
Overall length M+F (mm)	200,9
Length (mm)	124
Max. diameter (mm)	58,8
Weight (kg)	1,36

Related products

Item code	Type	Product name
808100018	Femmina	F VEP17HD 3/4 BSP

Spare kits

Item code	Product name
815701400	SPARE KIT OR NBR+BK M VEP17

Caps

Item code	Product name
815303133	PLASTIC CAP M VEP17 BLACK
815305079	ALUMINUM CAP M VEP17 NATURAL
815300079	ALUMINUM CAP M VEP17 RED*
815301079	ALUMINUM CAP M VEP17 YELLOW*
815302079	ALUMINUM CAP M VEP17 BLUE*
815303079	ALUMINUM CAP M VEP17 BLACK*
815304079	ALUMINUM CAP M VEP17 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service