
# F IRC34X BSP

Codice articolo: **808900106** / **Female**

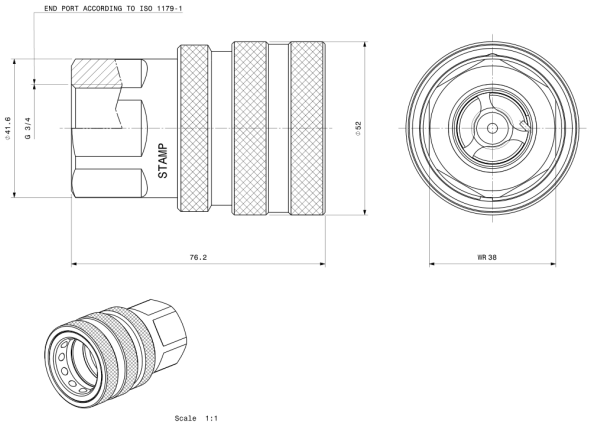


| | |
|---|---|
| **Valving style**<br>Poppet | **Body size**<br>3/4" |
| **Sealing**<br>FKM (VITON) | **Interchange**<br>Similar couplings (Nordic) |
| **Connection system**<br>Pull back the sleeve and push | **Disconnection system**<br>Pull back the sleeve |
| **Material**<br>Stainless steel (AISI 316L) | **Locking mechanism**<br>Locking ball + Safety sleeve |
| **Disconnectable under pressure**<br>No | **Thread**<br>FEMALE THREAD BSPP (ISO 1179-1) |
| **Connectable under residual pressure**<br>No | **Temperature**<br>-15 / +180 °C; +5 / +356 °F |
| **Applications**<br>Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Hydraulic Tools, Earthmoving, Agriculture, Vehicles | |

| Performance | IMPERIAL |
|---|---|
| ISO DN (mm) | 20 |
| Max. Flow suggested (gpm) | 56.18 |
| Max. Operating pressure - coupled (psi) | 2900 |
| Operating pressure - uncoupled (psi) | 2900 |
| Burst pressure - coupled (psi) | 11600 |
| Burst pressure - uncoupled (psi) | 11600 |
| Connect force (lbf) | 38.25 |
| Disconnect force (lbf) | 10.125 |
| Spillage (ml) | 15 |

| Dimensions | IMPERIAL |
|---|---|
| Port (A) | 3/4" |
| Overall length M+F (in) | 3,72 |
| Length (in) | 3,62 |
| Max. diameter (in) | 2,05 |
| Weight (lb) | 1,35 |

## Related products

| Item code | Type | Product name |
|---|---|---|
| 808900107 | Maschio | M IRC34X BSP |

## Spare kits

| Item code | Product name |
|---|---|
| 815700984 | SPARE KIT OR VITON+BK F IRC34 |

## Caps

| Item code | Product name |
|---|---|
| 815000048 | PLASTIC CAP F IRC34 RED |

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service