
F IRC38XPL BSP*

Codice articolo: **808900112** / **Female** / ***Prodotto disponibile su richiesta**

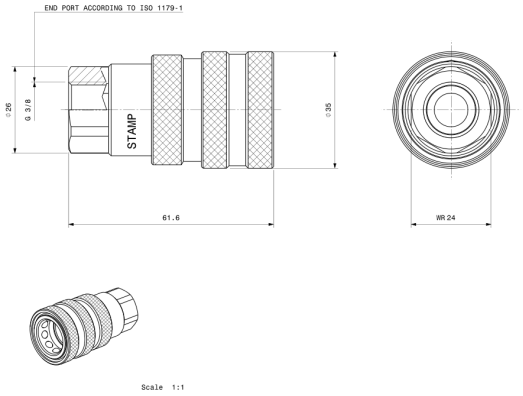

Valving style Poppet	**Body size** 3/8"
Sealing FKM (VITON)	**Interchange** Similar couplings (Nordic)
Connection system Pull back the sleeve and push	**Disconnection system** Pull back the sleeve
Material Stainless steel (AISI 316L)	**Locking mechanism** Locking ball + Safety sleeve
Disconnectable under pressure No	**Thread** FEMALE THREAD BSPP (ISO 1179-1)
Connectable under residual pressure No	**Temperature** -15 / +180 °C; +5 / +356 °F
Applications Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Hydraulic Tools, Earthmoving, Agriculture, Vehicles	

Performance	IMPERIAL
ISO DN (mm)	10
Max. Flow suggested (gpm)	12.19
Max. Operating pressure - coupled (psi)	4350
Operating pressure - uncoupled (psi)	3625
Burst pressure - coupled (psi)	17400
Burst pressure - uncoupled (psi)	14500
Connect force (lbf)	20,25
Disconnect force (lbf)	7.875
Spillage (ml)	2.5

Dimensions	IMPERIAL
Port (A)	3/8"
Overall length M+F (in)	3,01
Length (in)	2,66
Max. diameter (in)	1,38
Weight (lb)	0,49

Related products

Item code	Type	Product name
808900113	Maschio	M IRC38XPL BSP

Spare kits

Item code	Product name
815700980	SPARE KIT OR VITON+BK F IRC38

Caps

Item code	Product name
815000044	PLASTIC CAP F IRC38 RED

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service