
M/COUPLER VOF200 BSP

Codice articolo: **811200009** / **Coupler**

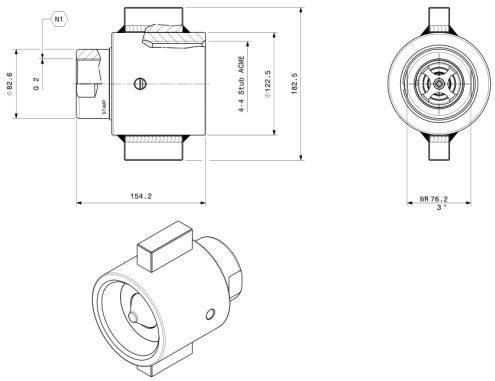

Valving style Poppet	**Body size** 2"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange Similar couplings (Oil&Gas)	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in one side
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Earthmoving, Oil & Gas

Performance	IMPERIAL
ISO DN (mm)	50
Max. Flow suggested (gpm)	291.5
Max. Operating pressure - coupled (psi)	5002.5
Operating pressure - uncoupled (psi)	5002.5
Burst pressure - coupled (psi)	14500
Burst pressure - uncoupled (psi)	13050
Spillage (ml)	192
Manual connect torque (lbf ft)	5.5275
Manual disconnect torque (lbf ft)	3.7587

Dimensions	IMPERIAL
Port (A)	2"
Overall length M+F (in)	10,05
Length (in)	6,07
Max. diameter (in)	7,19
Weight (lb)	17,87

Related products

Item code	Type	Product name
811200009	Coupler	M/COUPLER VOF200 BSP

Spare kits

Item code	Product name
815701320	SPARE KIT INTERNAL PARTS F-M VOF200 (NEW VERSION) *

Caps

Item code	Product name
815405019	ALUMINUM CAP P VOF200 NATURAL

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service