


F IRC100PCZN SAE*

Codice articolo: 812104016 / Female / *Prodotto disponibile su richiesta

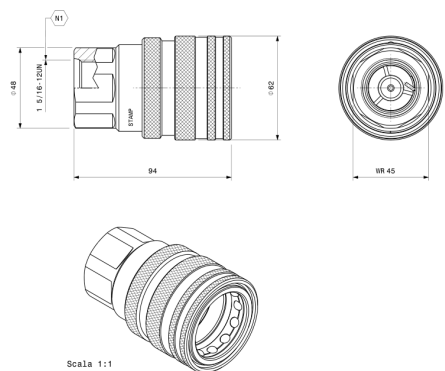

Body size 1"	Valving style Poppet
Interchange Similar couplings (Nordic)	Sealing Nitrile NBR
Connection system Pull back the sleeve and push	Disconnection system Pull back the sleeve
Material Carbon steel	Treatment Zn-Ni
Locking mechanism Locking ball + Safety sleeve	Disconnectable under pressure No
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	Connectable under residual pressure Pressure in one side
Temperature -20 / +100 °C; -4 / +212 °F	Applications Earthmoving, Agriculture, Vehicles, Hydraulic tools

Performance

	METRIC
ISO DN (mm)	25
Flow (l/min)	Da 350 a 600
Max. Flow suggested (l/min)	378
Max. Operating pressure - coupled (Mpa)	33
Operating pressure - uncoupled (mpa)	25
Burst pressure - coupled (mpa)	100
Burst pressure - uncoupled (mpa)	100
Connect force (N)	210
Disconnect force (N)	45
Spillage (ml)	18

Dimensions

	METRIC
Port (A)	1-5/16-12UN
Overall length M+F (mm)	117,4
Length (mm)	94
Max. diameter (mm)	62
Weight (kg)	1,03

Related products

Item code	Type	Product name
812104017	Maschio	M IRC100PCZN SAE

Spare kits

Item code	Product name
815700708	SPARE KIT OR NBR+BK F IRC100

Caps

Item code	Product name
815000050	PLASTIC CAP F IRC100 RED