
M A17V 1 SAE*

Codice articolo: **812504127** / **Male** / ***Prodotto disponibile su richiesta**

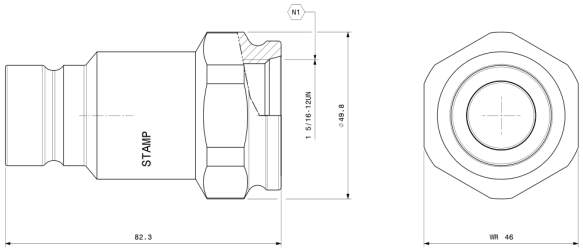

Valving style Flat face	**Body size** 3/4"
Sealing FKM (VITON)	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball + Safety lock	**Disconnectable under pressure** No
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connectable under residual pressure** No
Temperature -15 / +180 °C; +5 / +356 °F	**Applications** Material Handling, Robotics & Automation, Paper, Packaging, Leather, Utensili idraulici, Hydraulic Power Units, Injection Moulding, Die Casting, Others, Test Bench, Steel Mill, Rail, Road Construction, Foundation, Earth Moving, Coil Tubing Unit, Drilling Rig, Demolition, Construction Equipment Attachments, Ceramic, Agricultural Attachments, Agricultural Machinery, Earth moving, Agriculture, Vehicles, Oil & Gas

Performance	IMPERIAL
ISO DN (mm)	19
Max. Flow suggested (gpm)	5.3 3.18
Max. Operating pressure - coupled (psi)	5075
Burst pressure - coupled (psi)	15225
Burst pressure - uncoupled (psi)	15225
Connect force (lbf)	49.5
Disconnect force (lbf)	15.75
Spillage (ml)	0.03

Dimensions	IMPERIAL
Port (A)	1-5/16-12UN
Overall length M+F (in)	6,32
Length (in)	3,3
Max. diameter (in)	1,18
Weight (lb)	1,04

Related products

Product code	Type	Product name
812504126	Femmina	F A17V 1 SAE

Spare kits

Product code	Product name
815700253	SPARE KIT OR VITON+BK M FF 34

Caps

Product code	Product name
815100013	PLASTIC CAP M FF34 RED
816005011	ALUMINUM CAP M FF34 NATURAL
815101013	PLASTIC CAP M FF34 YELLOW**
815102013	PLASTIC CAP M FF34 BLUE**
815103013	PLASTIC CAP M FF34 BLACK**
815104013	PLASTIC CAP M FF34 GREEN**
815105013	PLASTIC CAP M FF34 WHITE**
815107031	PLASTIC CAP M FF34 ORANGE**
815110031	PLASTIC CAP M FF34 MAGENTA**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service