
M APM30 1-1/2 BSP

Codice articolo: **805200015** / **Male**

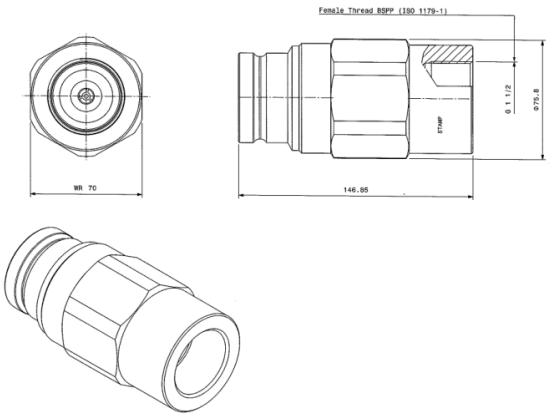

Valving style Flat face	**Body size** 1-1/2"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in male side only
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Earth Moving, Leather, Utensili idraulici, Hydraulic Power Units, Others, Test Bench, Rail, Road Construction, Material Handling, Foundation, Coil Tubing Unit, Drilling Rig, Demolition, Construction Equipment Attachments, Agricultural Attachments, Agricultural Machinery, Earth moving, Agriculture, Vehicles, Oil & Gas

Performance	METRIC
ISO DN (mm)	38
Max. Flow suggested (l/min)	750
Max. Operating pressure - coupled (Mpa)	27
Operating pressure - uncoupled (MPa)	27
Burst pressure - coupled (MPa)	80
Burst pressure - uncoupled (MPa)	100
Connect force (N)	440
Disconnect force (N)	80
Spillage (ml)	0.4

Dimensions	METRIC
Port (A)	1-1/2"
Overall length M+F (mm)	(F+D)-28,6
Length (mm)	146,9
Max. diameter (mm)	57
Weight (kg)	2,58

Spare kits

Product code	Product name
815700521	SPARE KIT OR NBR+BK M FF 112

Caps

Product code	Product name
815100017	ALUMINUM CAP M FF112 RED
815105017	ALUMINUM CAP M FF112 NATURAL
815101017	ALUMINUM CAP M FF112 YELLOW*
815102017	ALUMINUM CAP M FF112 BLUE*
815103017	ALUMINUM CAP M FF112 BLACK*
815104017	ALUMINUM CAP M FF112 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service