
F VEP7 1/4 BSP

Codice articolo: **806500008** / **Female**

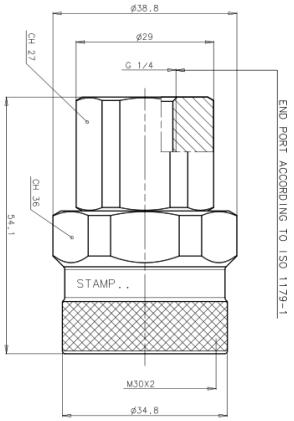

Valving style Flat face	**Body size** 1/4"
Sealing Nitrile NBR	**Treatment** Cr3 + QPQ
Interchange Stucchi profile VEP	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** Yes
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in both sides
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Steel Mill, Die Casting, Utensili idraulici, Earth moving, Vehicles, Oil & Gas

Performance	IMPERIAL
Max. Flow suggested (gpm)	6.36
Max. Operating pressure - coupled (psi)	8700
Operating pressure - uncoupled (psi)	6090
Burst pressure - coupled (psi)	21750
Burst pressure - uncoupled (psi)	18270
Spillage (ml)	0.01
Manual connect torque (lbf ft)	2.0636
Manual disconnect torque (lbf ft)	1.4003
Tightening torque (lbf ft)	29,48-36,85

Dimensions	IMPERIAL
Port (A)	1/4"
Overall length M+F (in)	4,46
Length (in)	2,13
Max. diameter (in)	1,53
Weight (lb)	0,55

Related products

Product code	Type	Product name
806500009	Maschio	M VEP7 1/4 BSP

Caps

Product code	Product name
815305070	ALUMINUM PLUG F VEP7 NATURAL
815300070	ALUMINUM PLUG F VEP7 RED*
815301070	ALUMINUM PLUG F VEP7 YELLOW*
815302070	ALUMINUM PLUG F VEP7 BLUE*
815303070	ALUMINUM PLUG F VEP7 BLACK*
815304070	ALUMINUM PLUG F VEP7 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service