
F AX21NED 1 BSP EXT

Codice articolo: **808500030** / **Female**

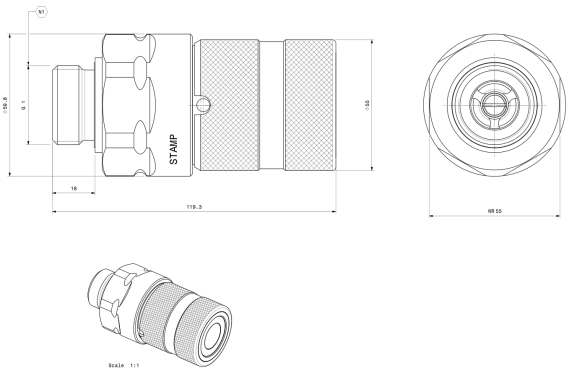

Valving style Flat face	**Body size** 1"
Sealing Nitrile NBR	**Interchange** ISO 16028
Connection system Push	**Disconnection system** Pull back the sleeve
Material Stainless steel	**Locking mechanism** Locking ball + Safety lock
Disconnectable under pressure No	**Thread** MALE THREAD BSPP (ISO 8434-6)
Connectable under residual pressure No	**Temperature** -20 / +100 °C; -4 / +212 °F

Applications
Medical Devices, Semiconductors, Leather, Food & Beverage, Defence, Laser, Electric Vehicles, Digital Transmitters, Injection Moulding, Die Casting, Others, Marine, Chemical Pharma, Windmill, Test Bench, Steel Mill, Rail, Data Center, Coil Tubing Unit, Drilling Rig, Oil & Gas

Performance	METRIC
ISO DN (mm)	31.5
Max. Flow suggested (l/min)	378
Max. Operating pressure - coupled (Mpa)	30
Operating pressure - uncoupled (MPa)	30
Connect force (N)	285
Disconnect force (N)	110
Spillage (ml)	0.03

Dimensions	METRIC
Port (A)	1"
Overall length M+F (mm)	211,3
Length (mm)	119,3
Max. diameter (mm)	59,8
Weight (kg)	1,47

Related products

Product code	Type	Product name
808500031	Maschio	M AX21NED 1 BSP EXT

Caps

Product code	Product name
815100012	PLASTIC CAP F FF100 RED
816005012	ALUMINUM CAP F FF100 NATURAL
815101012	PLASTIC CAP F FF100 YELLOW*
815102012	PLASTIC CAP F FF100 BLUE*
815103012	PLASTIC CAP F FF100 BLACK*
815104012	PLASTIC CAP F FF100 GREEN*
815105012	PLASTIC CAP F FF100 WHITE*
815107010	PLASTIC CAP F FF100 ORANGE*
815110010	PLASTIC CAP F FF100 MAGENTA*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service