
F AX7E 1/2 JIC*

Codice articolo: **808506200** / **Female** / ***Prodotto disponibile su richiesta**

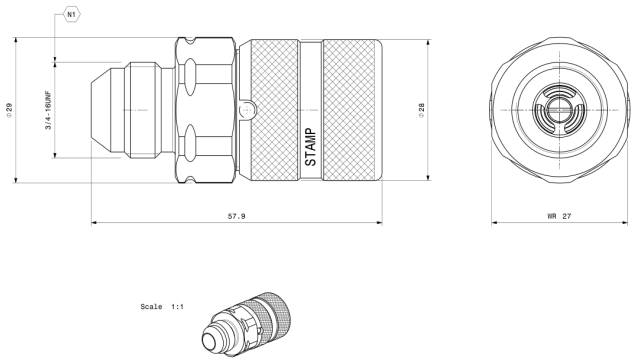

Valving style Flat face	**Body size** 1/4"
Sealing EPDM	**Interchange** ISO 16028
Connection system Push	**Disconnection system** Pull back the sleeve
Material Stainless steel	**Locking mechanism** Locking ball + Safety lock
Disconnectable under pressure No	**Thread** MALE THREAD JIC - (ISO 8434-2 & SAE J514)
Connectable under residual pressure No	**Temperature** -40 / +150 °C; -40 / +302 °F
Applications Die Casting, Semiconductors, Leather, Food & Beverage, Defence, Laser, Electric Vehicles, Digital Transmitters, Injection Moulding, Data Center, Others, Medical Devices, Marine, Chemical Pharma, Windmill, Test Bench, Steel Mill, Rail	

Performance	METRIC
ISO DN (mm)	16
Max. Flow suggested (l/min)	24
Max. Operating pressure - coupled (Mpa)	35
Operating pressure - uncoupled (MPa)	35
Burst pressure - coupled (MPa)	100
Burst pressure - uncoupled (MPa)	100
Connect force (N)	150
Disconnect force (N)	45
Spillage (ml)	0.01

Dimensions	METRIC
Port (A)	3/4-16UNF
Overall length M+F (mm)	98,6
Length (mm)	57,8
Max. diameter (mm)	29
Weight (kg)	0,17

Caps

Product code	Product name
815100000	PLASTIC CAP F FF14 RED
816005002	ALUMINUM CAP F FF14 NATURAL
815101000	PLASTIC CAP F FF14 YELLOW**
815102000	PLASTIC CAP F FF14 BLUE**
815103000	PLASTIC CAP F FF14 BLACK**
815104000	PLASTIC CAP F FF14 GREEN**
815105000	PLASTIC CAP F FF14 WHITE**
815107000	PLASTIC CAP F FF14 ORANGE**
815110000	PLASTIC CAP F FF14 MAGENTA**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service