
F AX13 S16

Codice articolo: **808509106** / **Female**

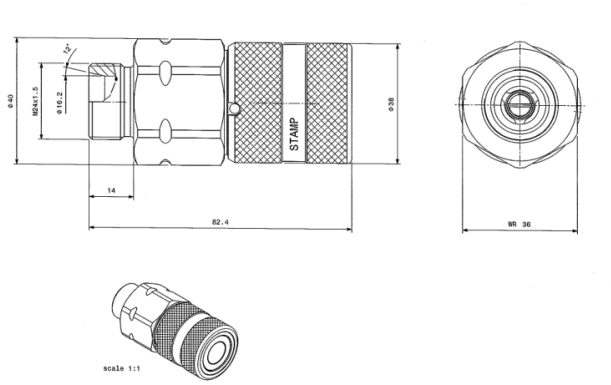

Valving style Flat face	**Body size** 1/2"
Sealing FKM (VITON)	**Interchange** ISO 16028
Connection system Push	**Disconnection system** Pull back the sleeve
Material Stainless steel	**Locking mechanism** Locking ball + Safety lock
Disconnectable under pressure No	**Thread** MALE THREAD METRIC S - 24° CONE (ISO 8434-1 & DIN 2353)
Connectable under residual pressure No	**Temperature** -15 / +180 °C; +5 / +356 °F
Applications Chemical Pharma, Marine, Medical Devices, Others, Defence, Food & Beverage, Leather, Semiconductors	

Performance	METRIC
ISO DN (mm)	12.5
Max. Flow suggested (l/min)	90
Max. Operating pressure - coupled (Mpa)	33
Operating pressure - uncoupled (MPa)	33
Connect force (N)	165
Disconnect force (N)	58
Spillage (ml)	0.02

Dimensions	METRIC
Port (A)	M24X1.5
Overall length M+F (mm)	171,2
Length (mm)	82,4
Max. diameter (mm)	40
Weight (kg)	0,46

Related products

Product code	Type	Product name
808509107	Maschio	M AX13 S16

Caps

Product code	Product name
815100004	PLASTIC CAP F FF12 RED
815200004	PLASTIC FLIP CAP F FF12 RED
816005006	ALUMINUM CAP F FF12 NATURAL
815101004	PLASTIC CAP F FF12 YELLOW*
815102004	PLASTIC CAP F FF12 BLUE*
815103004	PLASTIC CAP F FF12 BLACK*
815104004	PLASTIC CAP F FF12 GREEN*
815105004	PLASTIC CAP F FF12 WHITE*
815201004	PLASTIC FLIP CAP F FF12 YELLOW*
815202004	PLASTIC FLIP CAP F FF12 BLUE*
815203004	PLASTIC FLIP CAP F FF12 BLACK*
815204004	PLASTIC FLIP CAP F FF12 GREEN*
815207004	PLASTIC FLIP CAP F FF12 ORANGE*
815208004	PLASTIC FLIP CAP F FF12 BROWN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service