
F VR34ZN BSP*

Codice articolo: **813400000** / **Female** / ***Prodotto disponibile su richiesta**

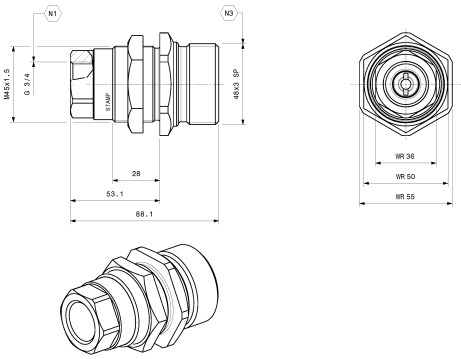

Valving style Flat face non spill	**Body size** 3/4"
Sealing Nitrile NBR	**Treatment** Zn-Ni
Interchange Similar couplings ("Rohrleitung")	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in one side
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Trucks & Vehicles

Performance	METRIC
ISO DN (mm)	20
Max. Flow suggested (l/min)	212
Max. Operating pressure - coupled (MPa)	35
Operating pressure - uncoupled (MPa)	35
Burst pressure - coupled (MPa)	140
Burst pressure - uncoupled (MPa)	100
Spillage (ml)	0.4
Manual connect torque (Nm)	2.2
Manual disconnect torque (Nm)	1.7

Dimensions	METRIC
Port (A)	M45x1.5
Length (mm)	88,1
Max. diameter (mm)	55
Weight (kg)	0,8

Related products

Product code	Type	Product name
813400001	Maschio	M VR34ZN BSP

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service