
F VR34ZN BSP*

Codice articolo: **813400000** / **Female** / ***Prodotto disponibile su richiesta**

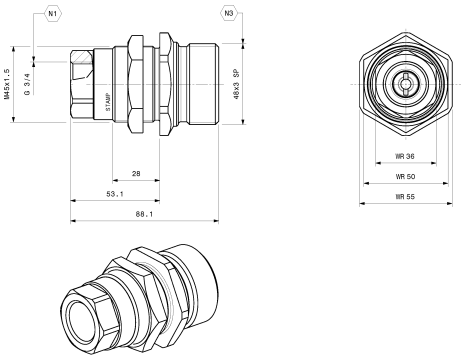

Valving style Flat face non spill	**Body size** 3/4"
Sealing Nitrile NBR	**Treatment** Zn-Ni
Interchange Similar couplings ("Rohrleitung")	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in one side
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Trucks & Vehicles

Performance	IMPERIAL
ISO DN (mm)	20
Max. Flow suggested (gpm)	56.18
Max. Operating pressure - coupled (psi)	5075
Operating pressure - uncoupled (psi)	5075
Burst pressure - coupled (psi)	20300
Burst pressure - uncoupled (psi)	14500
Spillage (ml)	0.4
Manual connect torque (lbf ft)	1.6214
Manual disconnect torque (lbf ft)	1.2529

Dimensions	IMPERIAL
Port (A)	M45x1.5
Length (in)	3,47
Max. diameter (in)	2,17
Weight (lb)	1,76

Related products

Product code	Type	Product name
813400001	Maschio	M VR34ZN BSP

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service