
# F IR14V 3/8 SAE*

Codice articolo: **800104000** / **Female** / ***Prodotto disponibile su richiesta**

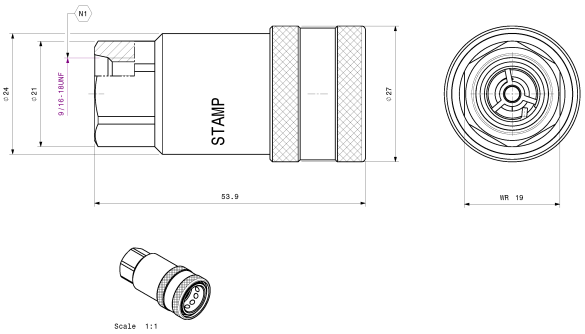


| | |
|---|---|
| **Valving style**<br>Poppet | **Body size**<br>1" |
| **Sealing**<br>FKM (VITON) | **Treatment**<br>Cr3 |
| **Interchange**<br>Similar couplings (IR-V) | **Connection system**<br>Pull back the sleeve and push |
| **Disconnection system**<br>Pull back the sleeve | **Material**<br>Carbon steel |
| **Locking mechanism**<br>Locking ball | **Disconnectable under pressure**<br>No |
| **Thread**<br>FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1) | **Connectable under residual pressure**<br>No |
| **Temperature**<br>-15 / +180 °C; +5 / +356 °F | **Applications**<br>Agricultural Machinery, Agricultural Attachments, Agriculture |

| Performance | METRIC |
|---|---|
| Max. Flow suggested (l/min) | 200 |
| Max. Operating pressure - coupled (MPa) | 20 |
| Operating pressure - uncoupled (MPa) | 20 |
| Burst pressure - coupled (MPa) | 80 |
| Burst pressure - uncoupled (MPa) | 80 |
| Connect force (N) | 210 |
| Disconnect force (N) | 65 |
| Spillage (ml) | 5.5 |

| Dimensions | METRIC |
|---|---|
| Port (A) | 9/16-18UNF |
| Overall length M+F (mm) | 57 |
| Length (mm) | 53,9 |
| Max. diameter (mm) | 27 |
| Weight (kg) | 0,12 |

## Related products

| Product code | Type | Product name |
|---|---|---|
| 800104001 | Maschio | M IR14V 3/8 SAE |

## Spare kits

| Product code | Product name |
|---|---|
| 815700348 | SPARE KIT OR NBR F IR14 |

## Caps

| Product code | Product name |
|---|---|
| 815000012 | PLASTIC PLUG F ISO-A 14 RED |
| 815001012 | PLASTIC PLUG F ISO-A 14 YELLOW** |
| 815002012 | PLASTIC PLUG F ISO-A 14 BLUE** |
| 815003012 | PLASTIC PLUG F ISO-A 14 BLACK** |
| 815004012 | PLASTIC PLUG F ISO-A 14 GREEN** |
| 815005012 | PLASTIC PLUG F ISO-A 14 WHITE** |

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service