
F IR14V 3/8 SAE*

Codice articolo: **800104000** / **Female** / ***Prodotto disponibile su richiesta**

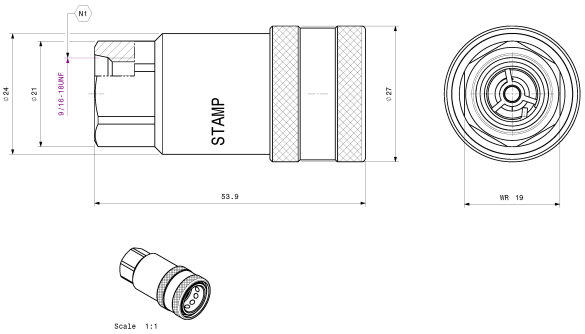

Valving style Poppet	**Body size** 1"
Sealing FKM (VITON)	**Treatment** Cr3
Interchange Similar couplings (IR-V)	**Connection system** Pull back the sleeve and push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball	**Disconnectable under pressure** No
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connectable under residual pressure** No
Temperature -15 / +180 °C; +5 / +356 °F	**Applications** Agricultural Machinery, Agricultural Attachments, Agriculture

Performance	IMPERIAL
Max. Flow suggested (gpm)	5.3
Max. Operating pressure - coupled (psi)	2900
Operating pressure - uncoupled (psi)	2900
Burst pressure - coupled (psi)	11600
Burst pressure - uncoupled (psi)	11600
Connect force (lbf)	47.25
Disconnect force (lbf)	14.625
Spillage (ml)	5.5

Dimensions	IMPERIAL
Port (A)	9/16-18UNF
Overall length M+F (in)	2,24
Length (in)	2,12
Max. diameter (in)	1,06
Weight (lb)	0,27

Related products

Product code	Type	Product name
800104001	Maschio	M IR14V 3/8 SAE

Spare kits

Product code	Product name
815700348	SPARE KIT OR NBR F IR14

Caps

Product code	Product name
815000012	PLASTIC PLUG F ISO-A 14 RED
815001012	PLASTIC PLUG F ISO-A 14 YELLOW**
815002012	PLASTIC PLUG F ISO-A 14 BLUE**
815003012	PLASTIC PLUG F ISO-A 14 BLACK**
815004012	PLASTIC PLUG F ISO-A 14 GREEN**
815005012	PLASTIC PLUG F ISO-A 14 WHITE**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service