
M IRB34 SAE*

Codice articolo: **800604009** / **Male** / ***Prodotto disponibile su richiesta**

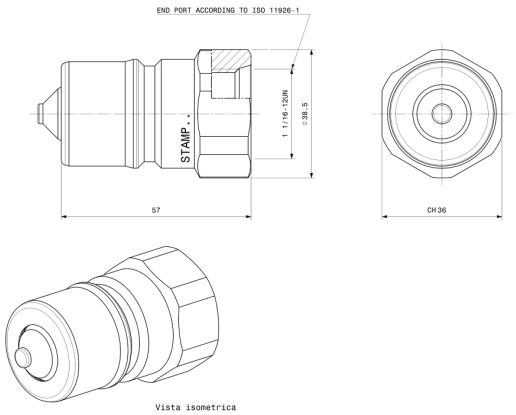

Valving style Poppet	**Body size** 3/4"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 7241 B	**Connection system** Pull back the sleeve and push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball	**Disconnectable under pressure** No
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connectable under residual pressure** No
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Foundation, Material Handling, Road Construction, Steel Mill, Test Bench, Hydraulic Power Units, Construction, Agriculture, Oil & Gas

Performance	IMPERIAL
ISO DN (mm)	19
Max. Flow suggested (gpm)	39.22
Max. Operating pressure - coupled (psi)	3335
Operating pressure - uncoupled (psi)	3335
Burst pressure - coupled (psi)	14500
Burst pressure - uncoupled (psi)	14500
Connect force (lbf)	28.125
Disconnect force (lbf)	9
Spillage (ml)	9.4

Dimensions	IMPERIAL
Port (A)	1-1/16-12UN
Overall length M+F (in)	4,53
Length (in)	2,24
Max. diameter (in)	1,52
Weight (lb)	0,47

Related products

Product code	Type	Product name
800604008	Femmina	F IRB34 SAE

Caps

Product code	Product name
815000039	PLASTIC CAP M ISO-B 34 RED
815003039	PLASTIC CAP M ISO-B 34 BLACK **

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service