
F FIRG9 1/2 BSP

Codice articolo: **800800002** / **Female**

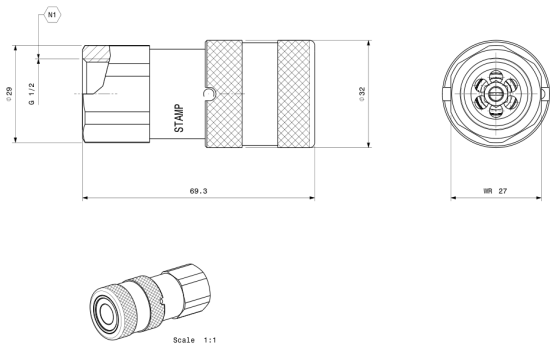

Valving style Flat face	**Body size** 3/8"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball + Safety lock	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** No
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Test Bench, Utensili idraulici, Construction, Agriculture, Trucks & Vehicles, Oil & Gas

Performance	IMPERIAL
ISO DN (mm)	10
Max. Flow suggested (gpm)	12.19
Max. Operating pressure - coupled (psi)	4350
Operating pressure - uncoupled (psi)	1740
Burst pressure - coupled (psi)	17400
Burst pressure - uncoupled (psi)	6960
Connect force (lbf)	33.75
Disconnect force (lbf)	9
Spillage (ml)	0.01

Dimensions	IMPERIAL
Port (A)	1/2"
Overall length M+F (in)	4,57
Length (in)	2,72
Max. diameter (in)	1,26
Weight (lb)	0,52

Related products

Product code	Type	Product name
800800003	Maschio	M FIRG9 1/2 BSP

Caps

Product code	Product name
815100002	PLASTIC CAP F FF38 RED
815200002	PLASTIC FLIP CAP F FF38 RED
816005004	ALUMINUM CAP F FF38 NATURAL
815101002	PLASTIC CAP F FF38 YELLOW*
815102002	PLASTIC CAP F FF38 BLUE*
815103002	PLASTIC CAP F FF38 BLACK*
815104002	PLASTIC CAP F FF38 GREEN*
815105002	PLASTIC CAP F FF38 WHITE*
815107002	PLASTIC CAP F FF38 ORANGE*
815110002	PLASTIC CAP F FF38 MAGENTA*
815201002	PLASTIC FLIP CAP F FF38 YELLOW*
815202002	PLASTIC FLIP CAP F FF38 BLUE*
815203002	PLASTIC FLIP CAP F FF38 BLACK*
815204002	PLASTIC FLIP CAP F FF38 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service