
F FIRG9QK 3/8 BSP

Codice articolo: **800900708** / **Female**

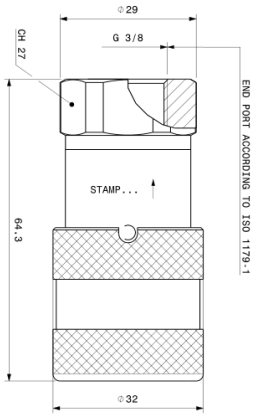

Valving style Flat face	**Body size** 3/8"
Sealing KALREZ	**Treatment** Acciaio inossidabile + QPQ
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel + Stainless steel (AISI 303)
Locking mechanism Locking ball + Safety lock	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** No
Temperature -25 / +300 °C; -13 / +572 °F	**Applications** Drilling Rig, Coil Tubing Unit, Steel Mill, Test Bench, Chemical Pharma, Others, Die Casting, Injection Molding, Food Beverage, Oil & Gas

Performance	IMPERIAL
ISO DN (mm)	10
Max. Flow suggested (gpm)	12.19
Max. Operating pressure - coupled (psi)	725
Operating pressure - uncoupled (psi)	725
Burst pressure - coupled (psi)	5800
Burst pressure - uncoupled (psi)	6960
Connect force (lbf)	36
Disconnect force (lbf)	7.875
Spillage (ml)	0.01

Dimensions	IMPERIAL
Port (A)	3/8"
Overall length M+F (in)	4,28
Length (in)	2,53
Max. diameter (in)	1,26
Weight (lb)	0,54

Related products

Product code	Type	Product name
800900709	Maschio	M FIRG9QK 3/8 BSP

Caps

Product code	Product name
815100002	PLASTIC CAP F FF38 RED
815200002	PLASTIC FLIP CAP F FF38 RED
816005004	ALUMINUM CAP F FF38 NATURAL
815101002	PLASTIC CAP F FF38 YELLOW*
815102002	PLASTIC CAP F FF38 BLUE*
815103002	PLASTIC CAP F FF38 BLACK*
815104002	PLASTIC CAP F FF38 GREEN*
815105002	PLASTIC CAP F FF38 WHITE*
815107002	PLASTIC CAP F FF38 ORANGE*
815110002	PLASTIC CAP F FF38 MAGENTA*
815201002	PLASTIC FLIP CAP F FF38 YELLOW*
815202002	PLASTIC FLIP CAP F FF38 BLUE*
815203002	PLASTIC FLIP CAP F FF38 BLACK*
815204002	PLASTIC FLIP CAP F FF38 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service