
F A9 1/2 SAE EXT

Codice articolo: **801304032** / **Female**

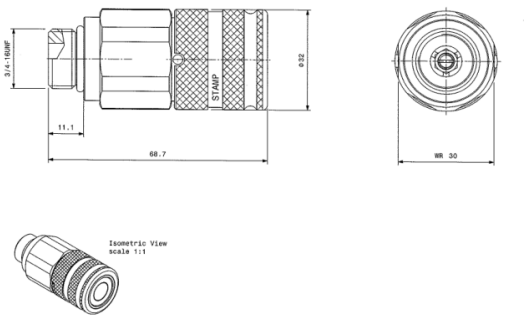

Valving style Flat face	**Body size** 3/8"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball + Safety lock	**Disconnectable under pressure** No
Thread MALE THREAD SAE (ISO 11926-2 & SAE J514)	**Connectable under residual pressure** No
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Material Handling, Robots Automation, Paper, Packaging, Leather, Utensili idraulici, Hydraulic Power Units, Injection Molding, Die Casting, Others, Test Bench, Steel Mill, Rail, Road Construction, Foundation, Earth Moving, Coil Tubing Unit, Drilling Rig, Demolition, Construction Equipment Attachments, Ceramic, Agricultural Attachments, Agricultural Machinery, Construction, Agriculture, Trucks & Vehicles, Oil & Gas

Performance	IMPERIAL
ISO DN (mm)	10
Max. Flow suggested (gpm)	12.19
Max. Operating pressure - coupled (psi)	5075
Operating pressure - uncoupled (psi)	5075
Burst pressure - coupled (psi)	14500
Burst pressure - uncoupled (psi)	14500
Connect force (lbf)	38.25
Disconnect force (lbf)	9
Spillage (ml)	0.01

Dimensions	IMPERIAL
Port (A)	3/4-16UNF
Overall length M+F (in)	4,6
Length (in)	2,7
Max. diameter (in)	1,26
Weight (lb)	0,6

Caps

Product code	Product name
815100002	PLASTIC CAP F FF38 RED
815200002	PLASTIC FLIP CAP F FF38 RED
816005004	ALUMINUM CAP F FF38 NATURAL
815101002	PLASTIC CAP F FF38 YELLOW*
815102002	PLASTIC CAP F FF38 BLUE*
815103002	PLASTIC CAP F FF38 BLACK*
815104002	PLASTIC CAP F FF38 GREEN*
815107002	PLASTIC CAP F FF38 ORANGE*
815110002	PLASTIC CAP F FF38 MAGENTA*
815201002	PLASTIC FLIP CAP F FF38 YELLOW*
815202002	PLASTIC FLIP CAP F FF38 BLUE*
815203002	PLASTIC FLIP CAP F FF38 BLACK*
815204002	PLASTIC FLIP CAP F FF38 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service