
F A15 L18 SCHOTT

Codice articolo: **801310018** / **Female**

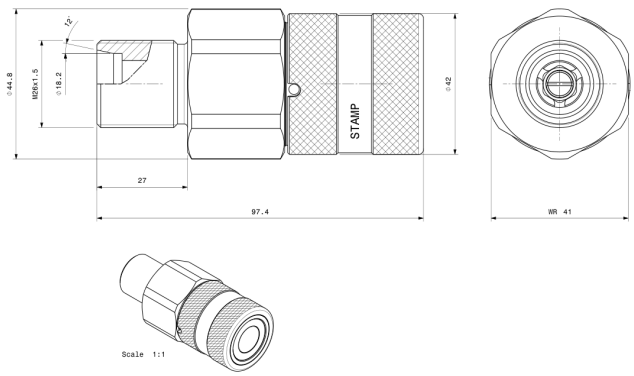

Valving style Flat face	**Body size** 5/8"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball + Safety lock	**Disconnectable under pressure** No
Thread MALE THREAD METRIC L SCHOTT - 24° CONE BULKHEAD (ISO 8434-1 & DIN 2353)	**Connectable under residual pressure** No
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction, Agriculture, Trucks & Vehicles, Oil & Gas

Performance	METRIC
ISO DN (mm)	16
Max. Flow suggested (l/min)	148
Max. Operating pressure - coupled (MPa)	33
Operating pressure - uncoupled (MPa)	33
Burst pressure - coupled (MPa)	100
Burst pressure - uncoupled (MPa)	100
Connect force (N)	190
Disconnect force (N)	55
Spillage (ml)	0.02

Dimensions	METRIC
Port (A)	M26x1.5
Overall length M+F (mm)	167,8
Length (mm)	97,5
Max. diameter (mm)	42
Weight (kg)	0,62

Caps

Product code	Product name
815100008	PLASTIC CAP F FF58 RED
815200006	PLASTIC FLIP CAP F FF58 RED
816005008	ALUMINUM CAP F FF58 NATURAL
815101008	PLASTIC CAP F FF58 YELLOW*
815102008	PLASTIC CAP F FF58 BLUE*
815103008	PLASTIC CAP F FF58 BLACK*
815104008	PLASTIC CAP F FF58 GREEN*
815105008	PLASTIC CAP F FF58 WHITE*
815107008	PLASTIC CAP F FF58 ORANGE*
815110008	PLASTIC CAP F FF58 MAGENTA*
815201006	PLASTIC FLIP CAP F FF58 YELLOW*
815202006	PLASTIC FLIP CAP F FF58 BLUE*
815203006	PLASTIC FLIP CAP F FF58 BLACK*
815204006	PLASTIC FLIP CAP F FF58 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service