
# M A5HP 1/4 NPT

Codice articolo: **801601005** / **Male**

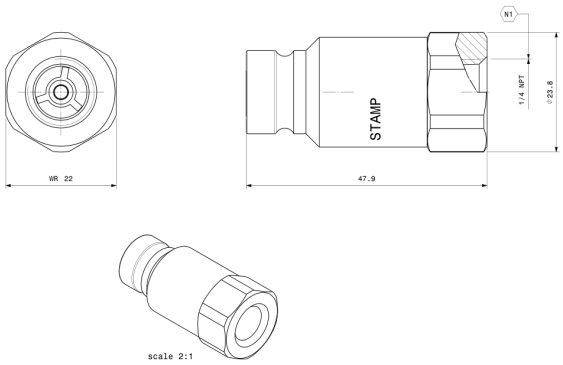


| | |
|---|---|
| **Valving style**<br>Flat face | **Body size**<br>1/4" |
| **Sealing**<br>Nitrile NBR | **Treatment**<br>Cr3 |
| **Interchange**<br>Stucchi profile A-HP | **Connection system**<br>Push |
| **Disconnection system**<br>Pull back the sleeve | **Material**<br>Carbon steel |
| **Locking mechanism**<br>Locking ball + Safety sleeve | **Disconnectable under pressure**<br>No |
| **Thread**<br>FEMALE THREAD NPT (ANSI B.1.20.1) | **Connectable under residual pressure**<br>No |
| **Temperature**<br>-20 / +100 °C; -4 / +212 °F | **Applications**<br>Rescue Equipments, Hydraulic Power Units, Utensili idraulici |

| Performance | IMPERIAL |
|---|---|
| Max. Flow suggested (gpm) | 6.36 |
| Max. Operating pressure - coupled (psi) | 10150 |
| Operating pressure - uncoupled (psi) | 10150 |
| Burst pressure - coupled (psi) | 29000 |
| Burst pressure - uncoupled (psi) | 29000 |
| Connect force (lbf) | 28.125 |
| Disconnect force (lbf) | 10.125 |
| Spillage (ml) | 0.02 |

| Dimensions | IMPERIAL |
|---|---|
| Port (A) | 1/4" |
| Overall length M+F (in) | 3,74 |
| Length (in) | 1,89 |
| Max. diameter (in) | 0,65 |
| Weight (lb) | 0,2 |

Related products

| Product code | Type | Product name |
|---|---|---|
| 801601004 | Femmina | F A5HP 1/4 NPT |

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service