
M FL9K 1/2 BSP*

Codice articolo: **802400701** / **Male** / ***Prodotto disponibile su richiesta**

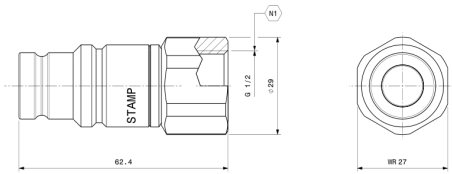

Valving style Flat face	**Body size** 3/8"
Sealing KALREZ	**Interchange** ISO 16028
Connection system Push	**Disconnection system** Pull back the sleeve
Material Stainless steel (AISI 316L)	**Locking mechanism** Locking ball + Safety lock
Disconnectable under pressure No	**Thread** FEMALE THREAD BSPP (ISO 1179-1)
Connectable under residual pressure No	**Temperature** -25 / +300 °C; -13 / +572 °F
Applications Drilling Rig, Coil Tubing Unit, Data Center, Rail, Steel Mill, Test Bench, Windmill, Chemical Pharma, Others, Die Casting, Injection Molding, Digital Transmitters, Electric Vehicles, Laser, Food Beverage, Oil & Gas	

Performance	IMPERIAL
ISO DN (mm)	10
Max. Flow suggested (gpm)	12.19
Max. Operating pressure - coupled (psi)	725
Operating pressure - uncoupled (psi)	725
Burst pressure - coupled (psi)	17400
Burst pressure - uncoupled (psi)	17400
Connect force (lbf)	36
Disconnect force (lbf)	10.125
Spillage (ml)	0.01

Dimensions	IMPERIAL
Port (A)	1/2"
Overall length M+F (in)	4,57
Length (in)	2,46
Max. diameter (in)	0,78
Weight (lb)	0,3

Related products

Product code	Type	Product name
802400700	Femmina	F FL9K 1/2 BSP

Caps

Product code	Product name
815100025	PLASTIC CAP M FF38 RED
816005005	ALUMINUM CAP M FF38 NATURAL
815101025	PLASTIC CAP M FF38 YELLOW**
815102025	PLASTIC CAP M FF38 BLUE**
815103025	PLASTIC CAP M FF38 BLACK**
815104025	PLASTIC CAP M FF38 GREEN**
815105025	PLASTIC CAP M FF38 WHITE**
815107027	PLASTIC CAP M FF38 ORANGE BIG RING**
815110027	PLASTIC CAP M FF38 MAGENTA BIG RING**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service