
# M FL30K 1-1/2 BSP*

Codice articolo: **802400709** / **Male** / ***Prodotto disponibile su richiesta**

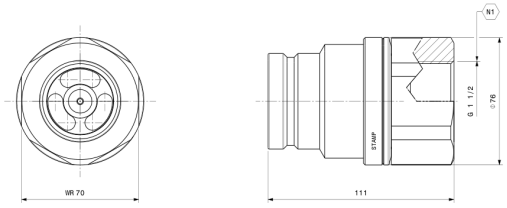


| | |
|---|---|
| **Valving style**<br>Flat face | **Body size**<br>1-1/2" |
| **Sealing**<br>KALREZ | **Interchange**<br>ISO 16028 |
| **Connection system**<br>Push | **Disconnection system**<br>Pull back the sleeve |
| **Material**<br>Stainless steel (AISI 316L) | **Locking mechanism**<br>Locking ball + Safety lock |
| **Disconnectable under pressure**<br>No | **Thread**<br>FEMALE THREAD BSPP (ISO 1179-1) |
| **Connectable under residual pressure**<br>No | **Temperature**<br>-25 / +300 °C; -13 / +572 °F |
| **Applications**<br>Drilling Rig, Coil Tubing Unit, Data Center, Rail, Steel Mill, Test Bench, Windmill, Chemical Pharma, Others, Die Casting, Injection Molding, Digital Transmitters, Electric Vehicles, Laser, Food Beverage, Oil & Gas | |

| Performance | METRIC |
|---|---|
| ISO DN (mm) | 38 |
| Max. Flow suggested (l/min) | 750 |
| Max. Operating pressure - coupled (MPa) | 5 |
| Operating pressure - uncoupled (MPa) | 5 |
| Burst pressure - coupled (MPa) | 40 |
| Burst pressure - uncoupled (MPa) | 40 |
| Connect force (N) | 580 |
| Disconnect force (N) | 160 |
| Spillage (ml) | 0.05 |

| Dimensions | METRIC |
|---|---|
| Port (A) | 1-1/2" |
| Overall length M+F (mm) | 214,8 |
| Length (mm) | 111 |
| Max. diameter (mm) | 57 |
| Weight (kg) | 1,9 |

Related products

| Product code | Type | Product name |
|---|---|---|
| 802400708 | Femmina | F FL30K 1-1/2 BSP |

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service