
F FL9 1/2 SAE*

Codice articolo: **802404104** / **Female** / ***Prodotto disponibile su richiesta**

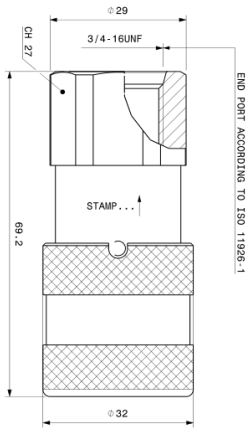

Valving style
Flat face

Body size
3/8"

Sealing
FKM (VITON)

Interchange
ISO 16028

Connection system
Push

Disconnection system
Pull back the sleeve

Material
Stainless steel (AISI 316L)

Locking mechanism
Locking ball + Safety lock

Disconnectable under pressure
No

Thread
FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)

Connectable under residual pressure
No

Temperature
-15 / +180 °C; +5 / +356 °F

Applications
Medical devices, Semiconductors, Packaging, Food Beverage, Laser, HVAC/R, Electric Vehicles, Digital Transmitters, Injection Molding, Die Casting, Others, Marine, Chemical Pharma, Windmill, Test Bench, Steel Mill, Rail, Data Center, Coil Tubing Unit, Drilling Rig, Oil & Gas

Performance	METRIC
ISO DN (mm)	10
Max. Flow suggested (l/min)	46
Max. Operating pressure - coupled (MPa)	35
Operating pressure - uncoupled (MPa)	15
Burst pressure - coupled (MPa)	140
Burst pressure - uncoupled (MPa)	60
Connect force (N)	160
Disconnect force (N)	45
Spillage (ml)	0.01

Dimensions	METRIC
Port (A)	3/4-16UNF
Overall length M+F (mm)	116,1
Length (mm)	69,2
Max. diameter (mm)	32
Weight (kg)	0,26

Related products

Product code	Type	Product name
802404105	Maschio	M FL9 1/2 SAE

Caps

Product code	Product name
815100002	PLASTIC CAP F FF38 RED
815200002	PLASTIC FLIP CAP F FF38 RED
816005004	ALUMINUM CAP F FF38 NATURAL
815101002	PLASTIC CAP F FF38 YELLOW**
815102002	PLASTIC CAP F FF38 BLUE**
815103002	PLASTIC CAP F FF38 BLACK**
815104002	PLASTIC CAP F FF38 GREEN**
815107002	PLASTIC CAP F FF38 ORANGE**
815110002	PLASTIC CAP F FF38 MAGENTA**
815201002	PLASTIC FLIP CAP F FF38 YELLOW**
815202002	PLASTIC FLIP CAP F FF38 BLUE**
815203002	PLASTIC FLIP CAP F FF38 BLACK**
815204002	PLASTIC FLIP CAP F FF38 GREEN**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service