

M IRBX34E BSP*

Codice articolo: **804600209** / **Male** / ***Prodotto disponibile su richiesta**

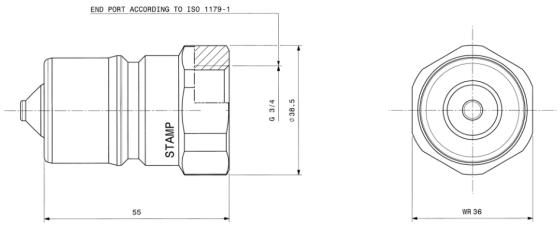

Scale 1:1



Valving style Poppet	**Body size** 3/4"
Sealing EPDM	**Interchange** ISO 7241 B
Connection system Pull back the sleeve and push	**Disconnection system** Pull back the sleeve
Material Stainless steel (AISI 316L) + Retainer in Brass	**Locking mechanism** Locking ball
Disconnectable under pressure No	**Thread** FEMALE THREAD BSPP (ISO 1179-1)
Connectable under residual pressure No	**Temperature** -40 / +150 °C; -40 / +302 °F
Applications Drilling Rig, Coil Tubing Unit, Rail, Steel Mill, Test Bench, Chemical Pharma, Marine, Others, Die Casting, Injection Molding, Electric Vehicles, Hydraulic Power Units, Defence, Food Beverage, Semiconductors, Oil & Gas	

Performance	IMPERIAL
ISO DN (mm)	19
Max. Flow suggested (gpm)	39.22
Max. Operating pressure - coupled (psi)	2320
Operating pressure - uncoupled (psi)	2320
Burst pressure - coupled (psi)	11600
Burst pressure - uncoupled (psi)	11600
Connect force (lbf)	30.375
Disconnect force (lbf)	12.375
Spillage (ml)	9.4

Dimensions	IMPERIAL
Port (A)	3/4"
Overall length M+F (in)	4,37
Length (in)	2,17
Max. diameter (in)	1,24
Weight (lb)	0,45

Related products

Product code	Type	Product name
804600208	Femmina	F IRBX34E BSP

Caps

Product code	Product name
815000039	PLASTIC CAP M ISO-B 34 RED
815003039	PLASTIC CAP M ISO-B 34 BLACK **

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service