
M APM15 BR6.5/57 3/4 BSP*

Codice articolo: **805100013** / **Male** / ***Prodotto disponibile su richiesta**

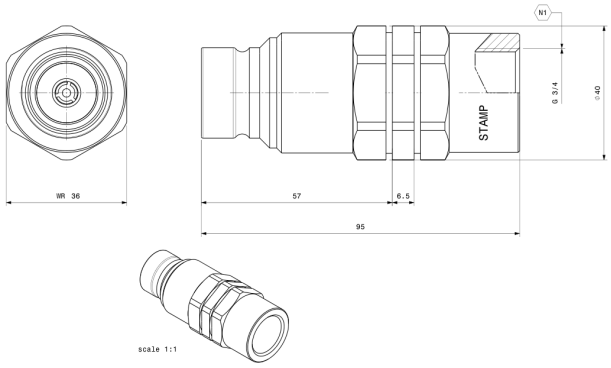

Valving style Flat face	**Body size** 5/8"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 16028	**Connection system** Push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in male side only
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Earth Moving, Leather, Utensili idraulici, Hydraulic Power Units, Others, Test Bench, Rail, Road Construction, Material Handling, Foundation, Coil Tubing Unit, Drilling Rig, Demolition, Construction Equipment Attachments, Agricultural Attachments, Agricultural Machinery, Construction, Agriculture, Trucks & Vehicles, Oil & Gas

Performance	METRIC
ISO DN (mm)	16
Max. Flow suggested (l/min)	148
Max. Operating pressure - coupled (MPa)	33
Operating pressure - uncoupled (MPa)	33
Burst pressure - coupled (MPa)	100
Burst pressure - uncoupled (MPa)	120
Connect force (N)	160
Disconnect force (N)	50
Spillage (ml)	0.03

Dimensions	METRIC
Port (A)	3/4"
Length (mm)	95
Max. diameter (mm)	40
Weight (kg)	0,43

Spare kits

Product code	Product name
815700341	SPARE KIT OR NBR+BK M FF 58

Caps

Product code	Product name
815100011	PLASTIC CAP M FF58 RED
816005009	ALUMINUM CAP M FF58 NATURAL
815101011	PLASTIC CAP M FF58 YELLOW**
815102011	PLASTIC CAP M FF58 BLUE**
815103011	PLASTIC CAP M FF58 BLACK**
815104011	PLASTIC CAP M FF58 GREEN**
815105011	PLASTIC CAP M FF58 WHITE**
815107011	PLASTIC CAP M FF58 ORANGE**
815110011	PLASTIC CAP M FF58 MAGENTA**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service