
F VEP17HD 1 SAE

Codice articolo: **808104012** / **Female**

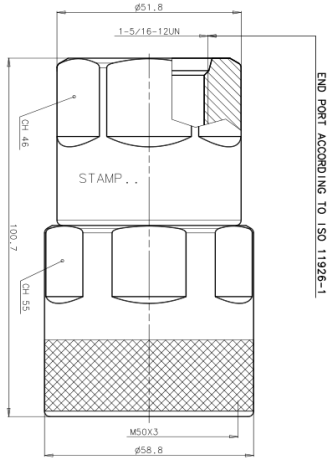

Valving style Flat face	**Body size** 3/4"
Sealing Nitrile NBR	**Treatment** Cr3 + QPQ
Interchange Stucchi profile VEP	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** Yes
Thread FEMALE THREAD SAE (ISO 11926-1 & SAE J1926-1)	**Connectable under residual pressure** Pressure in both sides
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Trucks & Vehicles, Oil & Gas

Performance	IMPERIAL
Max. Flow suggested (gpm)	5.3
Max. Operating pressure - coupled (psi)	7250
Operating pressure - uncoupled (psi)	4785
Burst pressure - coupled (psi)	18125
Burst pressure - uncoupled (psi)	14500
Spillage (ml)	0.02
Manual connect torque (lbf ft)	4.1272
Manual disconnect torque (lbf ft)	2.6532
Tightening torque (lbf ft)	81,07-95,81
Max. residual pressure during connection (in the male, female to drain) (psi)	3625
Max. residual pressure during connection (in the female, male to drain) (psi)	3625
Max. residual pressure during connection (in male and female) (psi)	2175
Max. residual pressure during disconnection (psi)	2175

Dimensions	IMPERIAL
Port (A)	1-5/16-12UN
Overall length M+F (in)	7,95
Length (in)	3,96
Max. diameter (in)	2,31
Weight (lb)	2,8

Related products

Product code	Type	Product name
808104013	Maschio	M VEP17HD 1 SAE

Caps

Product code	Product name
815303132	PLASTIC PLUG F VEP17 BLACK
815305078	ALUMINUM PLUG F VEP17 NATURAL
815300078	ALUMINUM PLUG F VEP17 RED*
815301078	ALUMINUM PLUG F VEP17 YELLOW*
815302078	ALUMINUM PLUG F VEP17 BLUE*
815303078	ALUMINUM PLUG F VEP17 BLACK*
815304078	ALUMINUM PLUG F VEP17 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service