
F VEP30HD 1-1/2 FPM CODE62

Codice articolo: **808124028** / **Female**

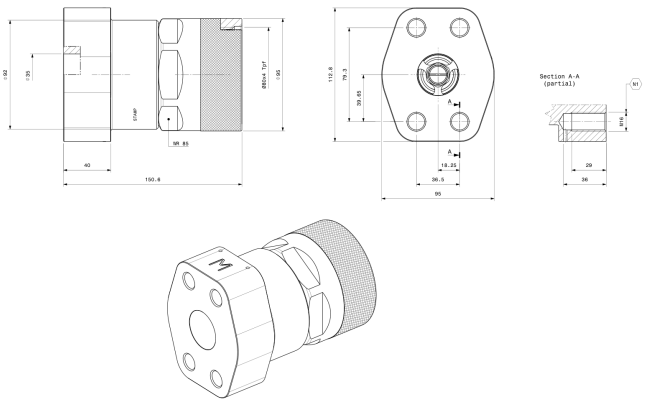

Valving style Flat face	**Body size** 1-1/2"
Sealing Nitrile NBR	**Treatment** Cr3 + QPQ
Interchange Stucchi profile VEP	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** Yes
Thread FLANGE PORT - 4 THREADED HOLES (ISO 6162-2 6000 psi & SAE J518)	**Connectable under residual pressure** Pressure in both sides
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Drilling Rig, Coil Tubing Unit, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Trucks & Vehicles, Oil & Gas

Performance	METRIC
Max. Flow suggested (l/min)	750
Max. Operating pressure - coupled (MPa)	42
Operating pressure - uncoupled (MPa)	27
Burst pressure - coupled (MPa)	165
Burst pressure - uncoupled (MPa)	80
Spillage (ml)	0.2
Manual connect torque (Nm)	26
Manual disconnect torque (Nm)	12.5
Tightening torque (Nm)	155-175
Max. residual pressure during connection (in the male, female to drain) (Mpa)	25
Max. residual pressure during connection (in the female, male to drain) (Mpa)	25
Max. residual pressure during connection (in male and female) (Mpa)	5
Max. residual pressure during disconnection (Mpa)	5

Dimensions	METRIC
Port (A)	1-1/2"
Overall length M+F (mm)	262,6
Length (mm)	150,6
Max. diameter (mm)	95
Weight (kg)	6,55

Related products

Product code	Type	Product name
808124029	Maschio	M VEP30HD 1-1/2 FPM CODE62

Caps

Product code	Product name
815303136	PLASTIC CAP F VEP30 BLACK
815305082	ALUMINUM CAP F VEP30 NATURAL
815300082	ALUMINUM PLUG F VEP30 RED*
815301082	ALUMINUM PLUG F VEP30 YELLOW*
815302082	ALUMINUM PLUG F VEP30 BLUE*
815303082	ALUMINUM PLUG F VEP30 BLACK*
815304082	ALUMINUM PLUG F VEP30 GREEN*

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service