
M AX7N 1/4 BSP*

Codice articolo: **808500003** / **Male** / ***Prodotto disponibile su richiesta**

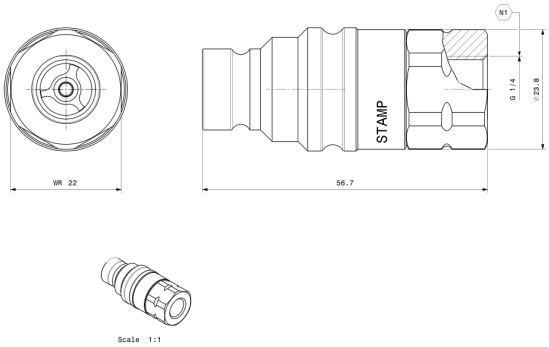

Valving style Flat face	**Body size** 1/4"
Sealing Nitrile NBR	**Interchange** ISO 16028
Connection system Push	**Disconnection system** Pull back the sleeve
Material Stainless steel	**Locking mechanism** Locking ball + Safety lock
Disconnectable under pressure No	**Thread** FEMALE THREAD BSPP (ISO 1179-1)
Connectable under residual pressure No	**Temperature** -20 / +100 °C; -4 / +212 °F

Applications
Medical devices, Semiconductors, Leather, Food Beverage, Defence, Laser, Electric Vehicles, Digital Transmitters, Injection Molding, Die Casting, Others, Marine, Chemical Pharma, Windmill, Test Bench, Steel Mill, Rail, Data Center, Coil Tubing Unit, Drilling Rig, Oil & Gas

Performance	IMPERIAL
ISO DN (mm)	16
Max. Flow suggested (gpm)	6.36
Max. Operating pressure - coupled (psi)	5075
Operating pressure - uncoupled (psi)	5075
Burst pressure - coupled (psi)	14500
Burst pressure - uncoupled (psi)	14500
Connect force (lbf)	33.75
Disconnect force (lbf)	10.125
Spillage (ml)	0.01

Dimensions	IMPERIAL
Port (A)	1/4"
Overall length M+F (in)	3,9
Length (in)	2,23
Max. diameter (in)	0,94
Weight (lb)	0,27

Related products

Product code	Type	Product name
808500002	Femmina	F AX7N 1/4 BSP

Spare kits

Product code	Product name
815700519	SPARE KIT OR NBR+BK M FF 14

Caps

Product code	Product name
816005003	ALUMINUM CAP M FF14 NATURAL

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service