
F AX7E 1/2 JIC*

Codice articolo: **808506200** / **Female** / ***Prodotto disponibile su richiesta**

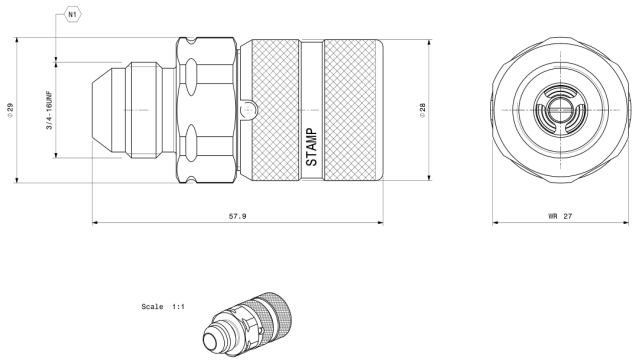

Valving style Flat face	**Body size** 1/4"
Sealing EPDM	**Interchange** ISO 16028
Connection system Push	**Disconnection system** Pull back the sleeve
Material Stainless steel	**Locking mechanism** Locking ball + Safety lock
Disconnectable under pressure No	**Thread** MALE THREAD JIC - (ISO 8434-2 & SAE J514)
Connectable under residual pressure No	**Temperature** -40 / +150 °C; -40 / +302 °F

Applications
Die Casting, Semiconductors, Leather, Food Beverage, Defence, Laser, Electric Vehicles, Digital Transmitters, Injection Molding, Data Center, Others, Medical devices, Marine, Chemical Pharma, Windmill, Test Bench, Steel Mill, Rail

Performance	IMPERIAL
ISO DN (mm)	16
Max. Flow suggested (gpm)	6.36
Max. Operating pressure - coupled (psi)	5075
Operating pressure - uncoupled (psi)	5075
Burst pressure - coupled (psi)	14500
Burst pressure - uncoupled (psi)	14500
Connect force (lbf)	33.75
Disconnect force (lbf)	10.125
Spillage (ml)	0.01

Dimensions	IMPERIAL
Port (A)	3/4-16UNF
Overall length M+F (in)	3,88
Length (in)	2,28
Max. diameter (in)	1,14
Weight (lb)	0,36

Caps

Product code	Product name
815100000	PLASTIC CAP F FF14 RED
816005002	ALUMINUM CAP F FF14 NATURAL
815101000	PLASTIC CAP F FF14 YELLOW**
815102000	PLASTIC CAP F FF14 BLUE**
815103000	PLASTIC CAP F FF14 BLACK**
815104000	PLASTIC CAP F FF14 GREEN**
815105000	PLASTIC CAP F FF14 WHITE**
815107000	PLASTIC CAP F FF14 ORANGE**
815110000	PLASTIC CAP F FF14 MAGENTA**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service