
# M IRC34X BSP

Codice articolo: **808900107** / **Male**

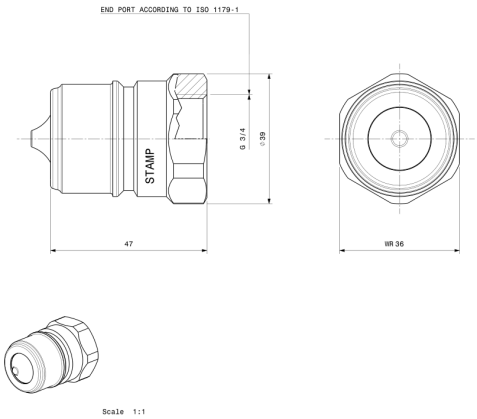


| | |
|---|---|
| **Valving style**<br>Poppet | **Body size**<br>3/4" |
| **Sealing**<br>FKM (VITON) | **Interchange**<br>Similar couplings (Nordic) |
| **Connection system**<br>Pull back the sleeve and push | **Disconnection system**<br>Pull back the sleeve |
| **Material**<br>Stainless steel (AISI 316L) | **Locking mechanism**<br>Locking ball + Safety sleeve |
| **Disconnectable under pressure**<br>No | **Thread**<br>FEMALE THREAD BSPP (ISO 1179-1) |
| **Connectable under residual pressure**<br>No | **Temperature**<br>-15 / +180 °C; +5 / +356 °F |
| **Applications**<br>Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Agriculture, Trucks & Vehicles | |

| Performance | METRIC |
|---|---|
| ISO DN (mm) | 20 |
| Max. Flow suggested (l/min) | 212 |
| Max. Operating pressure - coupled (MPa) | 20 |
| Operating pressure - uncoupled (MPa) | 20 |
| Burst pressure - coupled (MPa) | 80 |
| Burst pressure - uncoupled (MPa) | 80 |
| Connect force (N) | 170 |
| Disconnect force (N) | 45 |
| Spillage (ml) | 15 |

| Dimensions | METRIC |
|---|---|
| Port (A) | 3/4" |
| Overall length M+F (mm) | 94,6 |
| Length (mm) | 56,5 |
| Max. diameter (mm) | 32,7 |
| Weight (kg) | 0,2 |

## Related products

| Product code | Type | Product name |
|---|---|---|
| 808900106 | Femmina | F IRC34X BSP |

## Caps

| Product code | Product name |
|---|---|
| 815000049 | PLASTIC CAP M IRC34 RED |
| 815009049 | PLASTIC CAP M IRC34 GREY* |

**Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service