


# M IRC38XPL BSP\*

Codice articolo: 808900113 / Male / \*Prodotto disponibile su richiesta

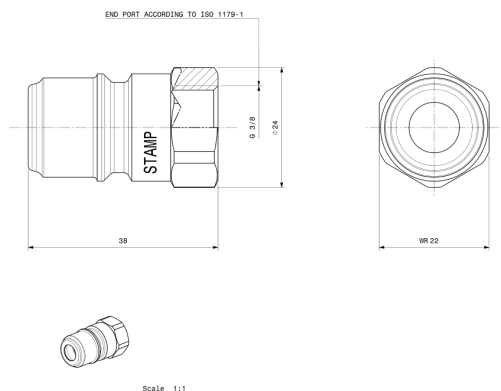

<b>Body size</b> 3/8"	<b>Valving style</b> Poppet
<b>Interchange</b> Similar couplings (Nordic)	<b>Sealing</b> FKM (VITON)
<b>Connection system</b> Pull back the sleeve and push	<b>Disconnection system</b> Pull back the sleeve
<b>Material</b> Stainless steel (AISI 316L)	<b>Locking mechanism</b> Locking ball + Safety sleeve
<b>Disconnectable under pressure</b> No	<b>Thread</b> FEMALE THREAD BSPP (ISO 1179-1)
<b>Connectable under residual pressure</b> No	<b>Temperature</b> -15 / +180 °C; +5 / +356 °F
<b>Applications</b> Earth moving, Agriculture, Vehicles, Hydraulic Tools	

## Performance

## METRIC

ISO DN (mm)	10
Flow (l/min)	Da 20 a 50
Max. Flow suggested (l/min)	46
Max. Operating pressure - coupled (Mpa)	30
Operating pressure - uncoupled (mpa)	25
Burst pressure - coupled (mpa)	120
Burst pressure - uncoupled (mpa)	100
Connect force (N)	90
Disconnect force (N)	35
Spillage (ml)	2.5

## Dimensions

## METRIC

Port (A)	3/8"
Overall length M+F (mm)	76,4
Length (mm)	42,5
Max. diameter (mm)	19,9
Weight (kg)	0,05

## Related products

Product code	Type	Product name
808900112	Femmina	F IRC38XPL BSP

## Caps

Product code	Product name
815000045	PLASTIC CAP M IRC38 RED
815009045	PLASTIC CAP M IRC38 GREY**

\*\*Product available upon request