
F IRC34XPL BSP*

Codice articolo: **808900118** / **Female** / ***Prodotto disponibile su richiesta**

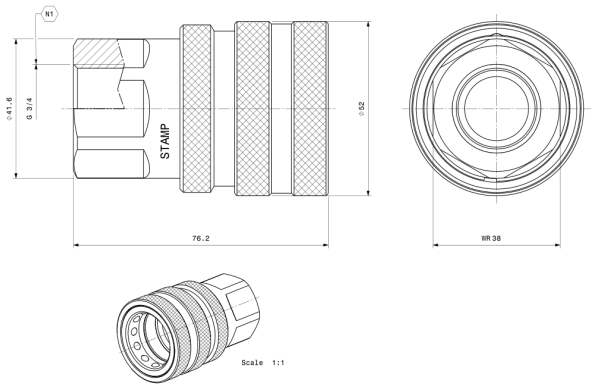

Valving style Poppet	**Body size** 3/4"
Sealing FKM (VITON)	**Interchange** Similar couplings (Nordic)
Connection system Pull back the sleeve and push	**Disconnection system** Pull back the sleeve
Material Stainless steel (AISI 316L)	**Locking mechanism** Locking ball + Safety sleeve
Disconnectable under pressure No	**Thread** FEMALE THREAD BSPP (ISO 1179-1)
Connectable under residual pressure No	**Temperature** -15 / +180 °C; +5 / +356 °F
Applications Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Agriculture, Trucks & Vehicles	

Performance	IMPERIAL
ISO DN (mm)	20
Max. Flow suggested (gpm)	56.18
Max. Operating pressure - coupled (psi)	2900
Operating pressure - uncoupled (psi)	2900
Burst pressure - coupled (psi)	11600
Burst pressure - uncoupled (psi)	11600
Connect force (lbf)	38.25
Disconnect force (lbf)	10.125
Spillage (ml)	15

Dimensions	IMPERIAL
Port (A)	3/4"
Overall length M+F (in)	3,72
Length (in)	3,62
Max. diameter (in)	2,05
Weight (lb)	1,3

Related products

Product code	Type	Product name
808900119	Maschio	M IRC34XPL BSP

Spare kits

Product code	Product name
815700984	SPARE KIT OR VITON+BK F IRC34

Caps

Product code	Product name
815000048	PLASTIC CAP F IRC34 RED

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service