
F VD12 1/2 BSP E DIN 3852-2-A*

Codice articolo: **809500004** / **Female** / ***Prodotto disponibile su richiesta**

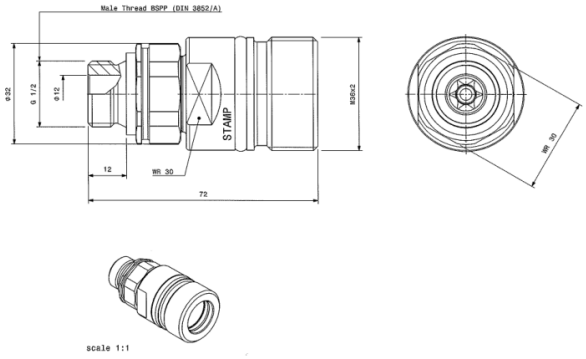

Valving style Poppet	**Body size** 1/2"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 14541	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in one side
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Trucks & Vehicles

Performance	METRIC
ISO DN (mm)	12.5
Max. Flow suggested (l/min)	90
Max. Operating pressure - coupled (MPa)	40
Operating pressure - uncoupled (MPa)	40
Burst pressure - coupled (MPa)	140
Burst pressure - uncoupled (MPa)	120
Spillage (ml)	3
Manual connect torque (Nm)	1.5
Manual disconnect torque (Nm)	1.2

Dimensions	METRIC
Port (A)	1/2"
Overall length M+F (mm)	115,6
Length (mm)	72
Max. diameter (mm)	32
Weight (kg)	0,27

Related products

Product code	Type	Product name
809500005	Maschio	M VD12 1/2 BSP E DIN 3852-2-A

Spare kits

Product code	Product name
815700904	SPARE KIT OR NBR+BK+EXT F VD12

Caps

Product code	Product name
814900004	PLASTIC CAP F VD12 RED

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service