
F VD12 1/2 BSP E DIN 3852-2-A*

Codice articolo: **809500004** / **Female** / ***Prodotto disponibile su richiesta**

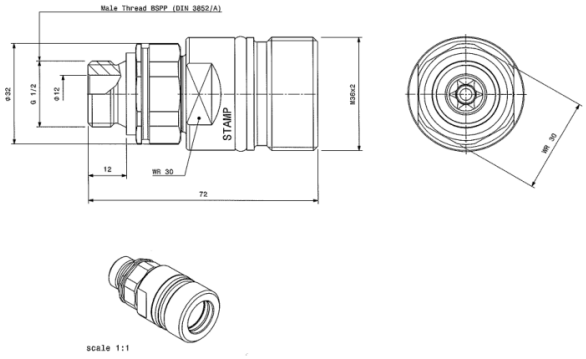

Valving style Poppet	**Body size** 1/2"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 14541	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** Pressure in one side
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Trucks & Vehicles

Performance	IMPERIAL
ISO DN (mm)	12.5
Max. Flow suggested (gpm)	23.85
Max. Operating pressure - coupled (psi)	5800
Operating pressure - uncoupled (psi)	5800
Burst pressure - coupled (psi)	20300
Burst pressure - uncoupled (psi)	17400
Spillage (ml)	3
Manual connect torque (lbf ft)	1.1055
Manual disconnect torque (lbf ft)	0.8844

Dimensions	IMPERIAL
Port (A)	1/2"
Overall length M+F (in)	4,55
Length (in)	2,83
Max. diameter (in)	1,26
Weight (lb)	0,59

Related products

Product code	Type	Product name
809500005	Maschio	M VD12 1/2 BSP E DIN 3852-2-A

Spare kits

Product code	Product name
815700904	SPARE KIT OR NBR+BK+EXT F VD12

Caps

Product code	Product name
814900004	PLASTIC CAP F VD12 RED

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service