
F VD100 S20

Codice articolo: **809509018** / **Female**

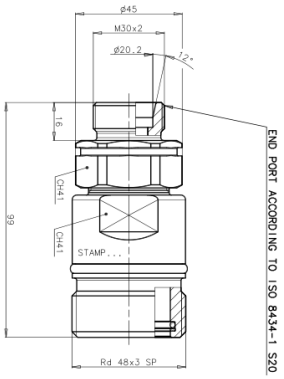

Valving style Poppet	**Body size** 1"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 14541	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** No
Thread MALE THREAD METRIC S - 24° CONE (ISO 8434-1 & DIN 2353)	**Connectable under residual pressure** Pressure in one side
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Trucks & Vehicles

Performance	METRIC
Max. Flow suggested (l/min)	200
Max. Operating pressure - coupled (MPa)	30
Operating pressure - uncoupled (MPa)	30
Burst pressure - coupled (MPa)	100
Burst pressure - uncoupled (MPa)	100
Spillage (ml)	14
Manual connect torque (Nm)	2.7
Manual disconnect torque (Nm)	2.2

Dimensions	METRIC
Port (A)	M30x2
Length (mm)	99
Max. diameter (mm)	47,8
Weight (kg)	0,72

Related products

Product code	Type	Product name
809509019	Maschio	M VD100 S20

Spare kits

Product code	Product name
815700908	SPARE KIT OR NBR+BK+EXT F VD100

Caps

Product code	Product name
814900016	PLASTIC CAP F VD100 RED

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service