
F VD34 L22 SCHOTT 36

Codice articolo: **809510028** / **Female**

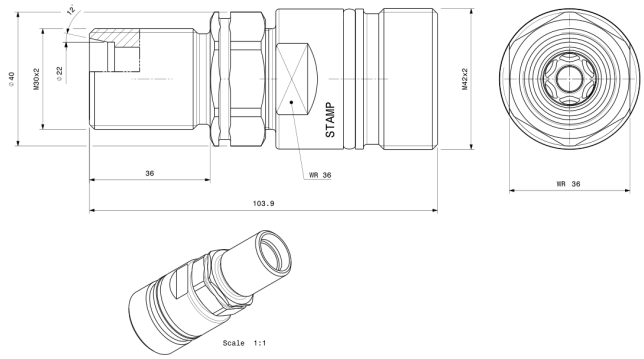

Valving style Poppet	**Body size** 3/4"
Sealing Nitrile NBR	**Treatment** Cr3
Interchange ISO 14541	**Connection system** Screw
Disconnection system Unscrew	**Material** Carbon steel
Locking mechanism Screw to connect	**Disconnectable under pressure** No
Thread MALE THREAD METRIC L SCHOTT - 24° CONE BULKHEAD (ISO 8434-1 & DIN 2353)	**Connectable under residual pressure** Pressure in one side
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Trucks & Vehicles

Performance	IMPERIAL
ISO DN (mm)	20
Max. Flow suggested (gpm)	39.22
Max. Operating pressure - coupled (psi)	5800
Operating pressure - uncoupled (psi)	5800
Burst pressure - coupled (psi)	14500
Burst pressure - uncoupled (psi)	14500
Spillage (ml)	5
Manual connect torque (lbf ft)	1.8425
Manual disconnect torque (lbf ft)	1.6214

Dimensions	IMPERIAL
Port (A)	M30x2
Length (in)	4,09
Max. diameter (in)	1,57
Weight (lb)	1,17

Related products

Product code	Type	Product name
809510029	Maschio	M VD34 L22 SCHOTT 36

Spare kits

Product code	Product name
815700906	SPARE KIT OR NBR+BK+EXT F VD34

Caps

Product code	Product name
814900006	PLASTIC CAP F VD34 RED

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service