
M IRC38PLZN BSP*

Codice articolo: **812100021** / **Male** / ***Prodotto disponibile su richiesta**

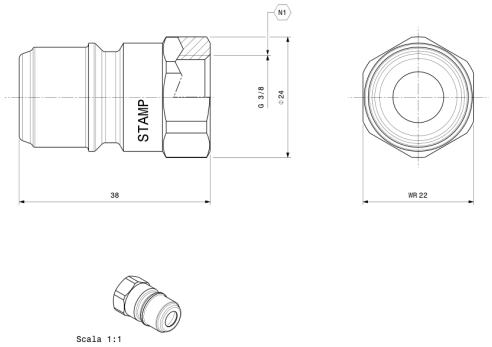

Valving style Poppet	**Body size** 3/8"
Sealing Nitrile NBR	**Treatment** Zn-Ni
Interchange Similar couplings (Nordic)	**Connection system** Pull back the sleeve and push
Disconnection system Pull back the sleeve	**Material** Carbon steel
Locking mechanism Locking ball + Safety sleeve	**Disconnectable under pressure** No
Thread FEMALE THREAD BSPP (ISO 1179-1)	**Connectable under residual pressure** No
Temperature -20 / +100 °C; -4 / +212 °F	**Applications** Agricultural Machinery, Agricultural Attachments, Construction Equipment Attachments, Demolition, Earth Moving, Foundation, Material Handling, Road Construction, Utensili idraulici, Construction, Agriculture, Trucks & Vehicles

Performance	METRIC
ISO DN (mm)	10
Max. Flow suggested (l/min)	46
Max. Operating pressure - coupled (MPa)	35
Operating pressure - uncoupled (MPa)	28
Burst pressure - coupled (MPa)	130
Burst pressure - uncoupled (MPa)	110
Connect force (N)	90
Disconnect force (N)	35
Spillage (ml)	2.5

Dimensions	METRIC
Port (A)	3/8"
Overall length M+F (mm)	76,4
Length (mm)	38
Max. diameter (mm)	19,9
Weight (kg)	0,05

Related products

Product code	Type	Product name
812100020	Femmina	F IRC38PLZN BSP

Caps

Product code	Product name
815000045	PLASTIC CAP M IRC38 RED
815009045	PLASTIC CAP M IRC38 GREY**

***Product available upon request*

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service