
M IR12 BSP

Codice articolo: **800000005** / **Macho**

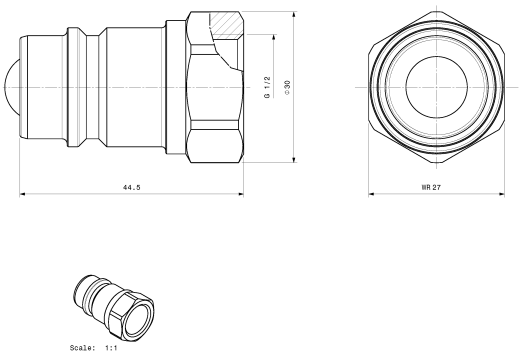

Estilo de válvula Bola	**Dimensión** 1/2"
Sellado Nitrile NBR	**Tratamiento** Cr3
Intercambio ISO 7241 A	**Sistema de conexión** Tirar el manguito hacia atrás y empujar
Sistema de desconexión Tirar el manguito hacia atrás	**Material** Acero al carbono
Mecanismo de bloqueo Bola de bloqueo	**Desconexión con presión** No
Roscas FEMALE THREAD BSPP (ISO 1179-1)	**Conexión con presión residual** No
Temperatura -20 / +100 °C; -4 / +212 °F	**Aplicaciones** Maquinaria agrícola, Implementos agrícolas, Agricultura

Rendimiento	METRIC
ISO DN (mm)	12.5
Caudal máximo (l/min)	90
Presión de trabajo máxima - acoplado (MPa)	25
Presión de trabajo - desacoplado (MPa)	20
Presión de ruptura - acoplado (MPa)	80
Presión de ruptura - desacoplado (MPa)	55
Fuerza de conexión (N)	80
Fuerza de desconexión (N)	50
Pérdida (ml)	2.3

Tamaño	METRIC
Dimensión roscas (A)	1/2"
Longitud total M+F (mm)	86,3
Longitud (mm)	44,5
Diámetro máximo (mm)	20,5
Peso (kg)	0,09

Productos relacionados

Código de producto	Tipologia	Nombre del producto
800000004	Femmina	F IR12 BSP

STUCCHI Quick Couplings Catalog - April 2021 - All right reserved.
Via della Lira Italiana, 397 24040 - Pagazzano (BG) Italy - Contact us
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service